

RESOLUTION MEPC.391(81) (adopted on 22 March 2024)
2024 GUIDELINES ON LIFE CYCLE GHG INTENSITY OF MARINE FUELS
(2024 LCA GUIDELINES)

ANNEX 10

RESOLUTION MEPC.391(81) (adopted on 22 March 2024)

2024 GUIDELINES ON LIFE CYCLE GHG INTENSITY OF MARINE FUELS (2024 LCA GUIDELINES)

THE MARINE ENVIRONMENT PROTECTION COMMITTEE,

RECALLING Article 38(a) of the Convention on the International Maritime Organization concerning the functions of the Marine Environment Protection Committee conferred upon it by international conventions for the prevention and control of marine pollution from ships,

RECALLING ALSO that, at its eightieth session, it adopted, by resolution MEPC.377(80), the *2023 IMO Strategy on Reduction of GHG Emissions from Ships* (2023 IMO GHG Strategy) setting out the levels of ambition for the international shipping sector in reducing GHG emissions,

RECALLING FURTHER that, at its eightieth session, it also adopted, by resolution MEPC.376(80), *Guidelines on life cycle GHG intensity of marine fuels* (LCA Guidelines);

NOTING that the 2023 IMO GHG Strategy provides that the levels of ambition and indicative checkpoints set out therein should take into account the well-to-wake GHG emissions of marine fuels as addressed in the LCA Guidelines,

NOTING ALSO that the 2023 IMO GHG Strategy provides that the basket of candidate mid-term GHG reduction measures should take into account the well-to-wake GHG emissions of marine fuels as addressed in the LCA Guidelines,

HAVING CONSIDERED, at its eighty-first session, draft 2024 Guidelines on life cycle GHG intensity of marine fuels,

- 1 ADOPTS the *2024 Guidelines on life cycle GHG intensity of marine fuels* (2024 LCA Guidelines), as set out in the annex to the present resolution;
- 2 AGREES that any regulatory application and implications of the 2024 LCA Guidelines should be determined by the Committee in the process of developing regulatory provisions,
- 3 REQUESTS Member Governments to bring the annexed Guidelines to the attention of shipowners, ship operators, shipbuilders, ship designers, energy companies, fuel producers, bunkering companies, engine manufacturers and any other interested parties;
- 4 AGREES to keep these Guidelines under review in light of experience gained with their implementation;
- 5 REVOKES the LCA Guidelines adopted by resolution MEPC.376(80).

**2024 GUIDELINES ON LIFE CYCLE GHG INTENSITY OF MARINE FUELS
(2024 LCA Guidelines)**

CONTENTS

PART I: GENERAL

1 INTRODUCTION

2 SCOPE

PART II: METHODOLOGY

3 GENERAL APPROACH

4 WELL-TO-TANK (WtT)

5 TANK-TO-WAKE (TtW)

6 WELL-TO-WAKE (WtW)

7 SUSTAINABILITY

8 FUEL LIFECYCLE LABEL (FLL)

PART III: DEFAULT EMISSION FACTORS AND ACTUAL VALUES

9 DEFAULT EMISSION FACTORS

10 ACTUAL EMISSION FACTORS

PART IV: VERIFICATION AND CERTIFICATION

11 ELEMENTS SUBJECT TO VERIFICATION/CERTIFICATION

12 IDENTIFICATION OF CERTIFICATION SCHEMES/STANDARDS

PART V: REVIEW

13 CONTINUOUS REVIEW PROCESS

APPENDIX 1 FUEL LIST WITH FUEL PATHWAY CODE

APPENDIX 2 INITIAL DEFAULT EMISSION FACTORS PER FUEL PATHWAY CODE

APPENDIX 3 ABBREVIATIONS AND GLOSSARY

APPENDIX 4 TEMPLATE FOR WELL-TO-TANK DEFAULT EMISSION FACTOR
SUBMISSION

APPENDIX 5 TEMPLATE FOR TANK-TO-WAKE DEFAULT EMISSION FACTOR
SUBMISSION

PART I: GENERAL

1 INTRODUCTION

These Guidelines provide guidance on life cycle GHG intensity assessment for all fuels and other energy carriers (e.g. electricity) used on board a ship and aim at covering the whole fuel life cycle (with specific boundaries), from feedstock extraction/cultivation/ recovery, feedstock conversion to a fuel product, transportation as well as distribution/bunkering, and fuel utilization on board a ship. These Guidelines also specify sustainability themes/aspects for marine fuels and define a Fuel Lifecycle Label (FLL), which carries information about fuel type, feedstock (feedstock type and feedstock nature/carbon source), conversion/production process (process type and energy used in the process), GHG emission factors, information on fuel blends and sustainability themes/aspects. These Guidelines specify the elements of FLL subject to verification/certification and include a general procedure on how the certification scheme/standards could be identified.

2 SCOPE

2.1 The scope of these Guidelines is to address well-to-tank (WtT), tank-to wake (TtW), and well-to-wake (WtW) GHG intensity and sustainability themes/aspects related to marine fuels/energy carriers (e.g. electricity for shore power) used for ship propulsion and power generation onboard. The relevant GHGs included are carbon dioxide (CO₂), methane (CH₄) and nitrous oxide (N₂O). These guidelines are not intended to provide guidance for a complete IMO GHG inventory for international shipping. Emissions from cargo (e.g. volatile organic compounds (VOC)), or use of refrigerants are not included; other short-lived climate forcers and precursors such as non-methane volatile organic compounds (NMVOC), sulphur oxides (SO_x), carbon monoxide (CO), particulate matter (PM) and Black Carbon are not part of the scope of these LCA guidelines.

2.2 The system boundaries of the WtW GHG emission factors calculation, in the context of these guidelines span the life cycle of fuels from their sourcing to production, conversion, transport, distribution, and eventually their use on board ships based on an attributional approach.¹ The possibility to expand the system boundaries for specific pathways in which the feedstock is displaced from present use(s) will be assessed on a case-by-case basis.² As such, emissions associated with the following life cycle stages of the fuel life cycle chain will be accounted for:

- .1 feedstock extraction/cultivation/acquisition/recovery;
- .2 feedstock (early) processing/ transformation at source;
- .3 feedstock transport to conversion site;
- .4 feedstock conversion to product fuel;
- .5 product fuel transport/storage/delivery/retail storage/bunkering; and
- .6 fuel utilization on board a ship.

¹ Attributional Life Cycle Assessment (LCA): LCA aiming to describe the environmentally relevant physical flows to and from a system and its subsystems over their life cycle; Consequential Life cycle Analysis (LCA): LCA aiming to describe how environmentally relevant flows will change in response to possible decisions. (Finnveden G, Hauschild MZ, Ekvall T, Guinée J, Heijungs R, Hellweg S, et al. "Recent developments in life cycle assessment". *Journal of Environmental Management*. 2009;91(1):1-21).

² Such as for captured CO₂ transportation and storage.

2.3 Consistent with the attributional approach and using best available scientific evidence, the WtT emissions calculations (i.e. emissions related to the fuel sourcing, production, conversion, transport and delivery) are assessed regardless of the final use of fuels/energy carriers, and the TtW emissions (i.e. emissions related to the fuel use) are quantified regardless of the sourcing/production/conversion/transport and delivery steps of the fuel/energy carrier. WtW emissions are given by the sum of the two parts, providing the full emission performance associated with the fuel production and use of a certain fuel/energy in a specific converter onboard.

2.4 The GHG emissions are calculated as CO₂-equivalent (CO_{2eq}), using the global warming potential over a 100-year time-horizon (GWP100) to convert emissions of other gases than CO₂, as given in the fifth IPCC Assessment Report,³ for CO₂, CH₄ and N₂O, as follows:

$$g_{CO_{2eq}(100y)} = GWP_{CO_2(100y)} \times g_{CO_2} + GWP_{CH_4(100y)} \times g_{CH_4} + GWP_{N_2O(100y)} \times g_{N_2O}$$

(CO₂ 1; CH₄ 28; N₂O 265), this would read as:

$$g_{CO_{2eq}(100y)} = 1 \times g_{CO_2} + 28 \times g_{CH_4} + 265 \times g_{N_2O}$$

These GWP100 values should be used for the purpose of quantifying the GHG intensity in accordance with these guidelines.

A calculation using a global warming potential over a 20-year horizon (GWP20) may be provided as information for comparative purposes, as follows:

$$g_{CO_{2eq}(20y)} = GWP_{CO_2(20y)} \times g_{CO_2} + GWP_{CH_4(20y)} \times g_{CH_4} + GWP_{N_2O(20y)} \times g_{N_2O}$$

(CO₂ 1; CH₄ 84; N₂O 264), this would read as:

$$g_{CO_{2eq}(20y)} = 1 \times g_{CO_2} + 84 \times g_{CH_4} + 264 \times g_{N_2O}$$

2.5 These Guidelines provide:

- .1 WtW GHG emission factors based on a life cycle attributional methodology, expressing the GHG profile of each representative fuel using on global warming potential (GWP) values over a 100-year time-horizon of included GHG (CO₂, CH₄ and N₂O);
- .2 WtT GHG emission factors (CO₂, CH₄ and N₂O) quantified consistently with the attributional approach;
- .3 TtW GHG emission factors (CO₂, CH₄ and N₂O); and
- .4 sustainability themes/aspects for marine fuels.

³ The global warming potential values as given in the *IPCC Fifth Assessment Report (AR5)* are used in the context of these Guidelines.

2.6 These Guidelines define a FLL that carries information about fuel type, feedstock used, fuel production pathway, GHG emission factors, information on fuel blends and sustainability themes/aspects.

2.7 The figure below shows a generic WtW supply chain for a fuel. The bunkering marks the last step in the WtT phase before the TtW phase starts.

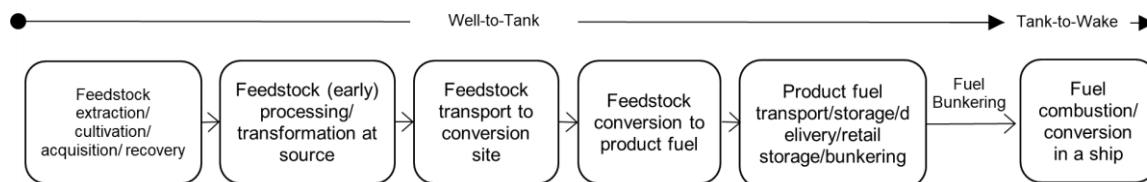


Figure 1: Generic well-to-wake supply chain

2.8 These Guidelines include an initial non-exhaustive list of fuels in appendix 1, depicting the main current and expected future marine fuels.

PART II: METHODOLOGY

3 GENERAL APPROACH

3.1 A life cycle assessment (LCA) based approach provides a holistic assessment of the product/service/system from well-to-wake using data specific to the activity considered. The LCA methodology follows the marine fuel from feedstock sourcing to its utilization onboard ships and assesses its life cycle GHG intensity. This approach, applied within the boundaries of the WtW GHG emissions quantification, is applicable across all geographical regions, where emissions occur and allows for quantifying the GHG intensity over the entire fuel/energy supply chain.

3.2 General principles and methodology can be found in ISO 14044:2006 *Environmental management — Lifecycle assessment — Requirements and guidelines*. ISO 14040:2006 *Environmental management — Lifecycle assessment — Principles and framework* sets the framework for the LCA, for the quantification of the environmental impact of products, processes and services in the supply chain. On this basis, a specific LCA methodology can be tailored for its application to marine fuels.

3.3 WtT emissions represent GHG emissions resulting from growing or extracting raw materials, producing and transporting the fuel up to the point of use, including bunkering.

3.4 TtW emissions represent GHG emissions resulting from fuel utilization onboard (e.g. combustion), including potential leaks (fugitive emissions and slip), when relevant for the GHG assessment.

3.5 WtW emissions are the sum of the WtT and TtW emissions and quantify the full life cycle GHG emissions for a given fuel and fuel pathway, used in a given energy converter on board.

3.6 The attributional approach considers all processes along the supply chain of fuel/energy carrier pathways, allowing the quantification of contributions per segment to the overall GHG intensity of the final fuel/energy product used on board a ship. The expansion of the system boundaries for specific pathways, in which the feedstock or intermediate products are diverted from existing use(s), may be considered on a case-by-case basis.

3.7 As regards the expansion of the system boundaries, with consequential elements such as Indirect Land Usage Change (ILUC), concerns with respect to uncertainties and the risk of arbitrariness suggest that the feedstocks with associated ILUC should only be assessed through a risk-based approach, in the framework of sustainability themes/aspects, as part of these guidelines.

3.8 When more than one product results from a conversion process, emissions related to the fuel production should be allocated between main product and co-products. Within such conversion processes, emissions are allocated using their energy content, the so-called "energy allocation" approach. Where co-products allocation cannot be performed based on their energy content (e.g. Oxygen resulting from water electrolysis for H₂ production), other methods such as mass allocation, market revenue allocation (also known as "economic allocation"), could be considered on a case-by-case basis.

3.9 A *co-product* is defined as "an outcome of a production process, which has economic value and elastic supply (intended as the existence of a clear evidence of the causal link between feedstock market value and the quantity of feedstock that can be produced)".

3.10 This definition applies also when a raw material used to produce the fuels is a waste (no economic value) or a residue (unavoidably produced and with negligible economic value, needing further processing to be used in the main conversion process). In case the feedstock is a waste, a residue or a by-product, emissions considered as WtT start at the feedstock collection point onwards until the point of use of the final fuel/energy product.

3.11 According to the *IPCC Guidelines for National Greenhouse Gas Inventories* (IPCC Guidelines)⁴, any carbon in the fuel derived from biomass should be reported as an information item and not included in the sectoral or national totals to avoid double counting, since the net emissions from biomass are already accounted for in the Agriculture Forestry and Other Land Use (AFOLU) sector at a national level.

3.12 The scope of the IMO LCA Guidelines does not affect or change the IPCC Guidelines. According to the IPCC Guidelines, international waterborne navigation (international bunkers) is grouped under "Mobile combustion" under the Energy sector, but emissions from fuel used by ships in international transport should not be included in national totals in national GHG inventories.

3.13 A fuel batch may be a mix of fuels made from various feedstocks and sources (e.g. by blending 20% biodiesel into fossil MGO) and/or through different production pathways. The calculation should be done using the weighted averages of the energy of the various fuel components. Relevant information should accompany each component fuel in the FLL. Blended fuels should be included in the certification schemes and relevant GHG default or actual emission factors (gCO₂/MJ) determined in proportion to the energy of each fuel part of the blend.

4 WELL-TO-TANK (WtT)

4.1 The pathway of each relevant marine fuel should be clearly described and the GHG emissions during each step of the fuel pathway should be calculated. Specific GHG emissions of a specific non-conventional and non-fossil fuel's pathway may take into account different characteristics across geographic regions, where feedstock production and/or conversion occurs, as appropriate.

⁴ 2006 IPCC Guidelines for National Greenhouse Gas Inventories.

4.2 Any further reference in this document to a "fuel pathway" should be understood to include the feedstock structure (the so-called nature/carbon source and feedstock type pair) and the production or conversion process (noting that the same feedstock and fuel type pair can have a different production or conversion process).

4.3 The aim of the WtT methodology is to quantify and evaluate the GHG intensity of fuel production, including all steps mentioned in figure 2. The carbon feedstock and production pathway of a fuel should be identified in order to apply the methodology and is included as part of the FLL. The production steps to be included in the WtT are presented in figure 2.

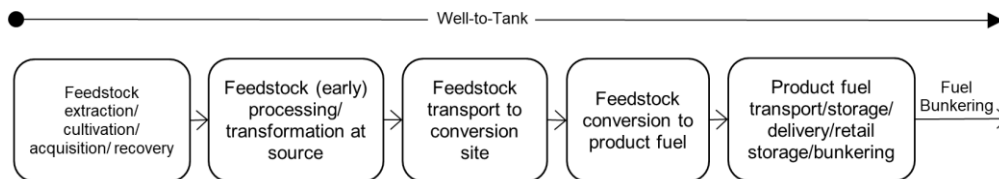


Figure 2: Generic well-to-tank supply chain

4.4 The WtT GHG emission factor ($gCO_{2eq}/MJ_{(LCV)}$ fuel or electricity) is calculated according to Equation (1).

Equation (1)

$$GHG_{WtT} = e_{fecu} + e_l + e_p + e_{td} - e_{sca} - e_{ccs}$$

Term	Units	Explanation
e_{fecu}	$gCO_{2eq}/MJ_{(LCV)}$	Emissions associated with the feedstock extraction/cultivation/acquisition/recovery
e_l	$gCO_{2eq}/MJ_{(LCV)}$	Emissions (annualized emissions (over 20 years) from carbon stock changes caused by direct land-use change) ⁵
e_p	$gCO_{2eq}/MJ_{(LCV)}$	Emissions associated with the feedstock processing and/or transformation at source and emissions associated with the conversion of the feedstock to the final fuel product, including electricity generation
e_{td}	$gCO_{2eq}/MJ_{(LCV)}$	Emissions associated with the feedstock transport to conversion plant, and the emissions associated with the finished fuel transport and storage, local delivery, retail storage and bunkering
e_{sca}	$gCO_{2eq}/MJ_{(LCV)}$	Emissions (annualized emission savings (over 20 years) from soil carbon accumulation via improved agricultural management) ⁶
e_{ccs}	$gCO_{2eq}/MJ_{(LCV)}$	Emissions credit from carbon capture and storage (e_{ccs}), that have not already been accounted for in e_p . This should properly account the avoided emissions through the capture and sequestration of emitted CO_2 , related to the extraction, transport, processing and distribution of fuel (C_{sc}). From the

⁵ Pending further methodological guidance to be developed by the Organization, the value of parameter e_l should be set to zero.

⁶ Pending further methodological guidance to be developed by the Organization, the value of parameter e_{sca} should be set to zero.

Term	Units	Explanation
		above-mentioned emission credit, all the emissions resulting from the process of capturing (e_{cc}) and transporting (e_t) the CO ₂ up to the final storage (including the emissions related to the injection, etc.) need to be deducted. This element should be calculated with the following formula: $e_{CCS} = c_{SC} - e_{cc} - e_t - e_{st} - e_x$
c_{SC}	g CO ₂ stored / MJ _(LCV)	Emissions credit equivalent to the net CO ₂ captured and stored (long-term: 100 years)
e_{cc}	gCO _{2eq} / MJ _(LCV)	Emissions associated with the process of capturing, compression and/or cooling and temporary storage of the CO ₂
e_t	gCO _{2eq} / MJ _(LCV)	Emissions associated with transport to a long-term storage site
e_{st}	gCO _{2eq} / MJ _(LCV)	Any emissions associated with the process of storing (long-term: 100 years) the captured CO ₂ (including fugitive emissions that may happen during long-term storage and/or the injection of CO ₂ into the storage)
e_x	gCO _{2eq} / MJ _(LCV)	Any additional emissions related to the CCS

4.5 The WtT emissions in Equation (1) include emissions associated with raw materials extraction or cultivation, primary energy sources used for production of goods and utilities such as energy carriers (e.g. fuels and electricity), transport and distribution (including bunkering), direct land use change and changes in carbon stocks (soil carbon accumulation).

4.6 Processing incorporates all steps and operations needed for the extraction, capture or cultivation of the primary energy source. Process includes basic transformation at source and operations needed to make the resource transportable to the marketplace (e.g. drying, chemical/physical upgrade such as gas-to-liquid, etc.).

4.7 Transportation, processing and distribution include transportation of the products in the fuel pathway to the place of transformation, conditioning (such as compression, cooling), distribution to the marketplace (i.e. bunkering) and eventual leakages, as well as fugitive emissions at any of these stages. Regarding emissions from bunkering, it is included till the bunker manifold, including emission from the bunker manifold connection.

4.8 Allocation of emissions to co-products based on their energy content should be used, as the most appropriate and reliable methodology considering the establishment of an appropriate certification method using values that are predictable, reproducible and stable.

4.9 Land use (direct and indirect) for the production of biofuels may lead to land use change (LUC). LUC can be classified as direct LUC (DLUC) and indirect LUC (ILUC).

4.10 The DLUC definition is based on ISO 14067:2018 described as a change in the use or management of land within the product system being assessed. The DLUC impacts comprises the emissions and sequestration resulting from carbon stock changes in biomass, dead organic matter and soil organic matters, evaluated in accordance with the IPCC Guidelines. When available, sector or country-specific data on carbon stocks may be used; otherwise, IPCC's Tier 1 default emission factors may be considered. Two terms in the WtT Equation (1) capture respectively emissions resulting from direct land use change, i.e. e_l , and sequestration or otherwise increase in the content of soil organic carbon: e_{sca} .

4.11 The ILUC definition is based on ISO 14067:2018, described as a change in the use or management of land, which is a consequence of direct land use change, but which occurs outside the product system being assessed. ILUC occurs as a result of the economic impacts induced by increased biofuel demand on commodity prices with resulting shifts in demand and supply across economic sectors, including primarily food and feed production. ILUC cannot be directly measured and is projected with economic models instead.

4.12 Owing to the variability of assumptions underlying the evaluation of indirect effects, quantitative assessment of GHG effects of ILUC is subject to uncertainty, high quantitative variability and to the risk of arbitrary conclusions. For these reasons, ILUC should be at this stage addressed using a risk-based approach, meaning that quantitative values will not be calculated and assigned to each fuel pathway. The ILUC emissions, as well as the spatial dimension of the ILUC effects, are dependent on a variety of factors such as local/regional conditions and practices for agriculture, current and expected food import demand, national current accounts, the type of feedstock, the alternative economic uses of the same feedstock, etc.

4.13 A qualitative risk-based approach to ILUC includes consideration on the following:

- .1 *Low-ILUC risk* qualifies and characterizes biofuel production projects that supply additional feedstock without disrupting existing land uses. When productivity is increased on an area which is in agricultural production, only additional yields should be considered as low-ILUC rather than the entire production; and
- .2 *High-ILUC risk* qualifies and characterizes biofuel production projects based on, or displacing, food and feed crops resulting in a significant expansion of the feedstock production area shifting into land with high carbon stock.

4.14 WtT default emission factors are provided in appendix 2 of these guidelines.

5 TANK-TO-WAKE (TtW)

5.1 The aim of the TtW methodology is to quantify and evaluate the intensity of CO₂, CH₄ and N₂O emitted on board a ship related to the fuel usage, including combustion/conversion and all relevant fugitive emissions, from the bunker manifold up to the energy converter which is leaked, vented or otherwise lost in the system, with a global warming potential.

5.2 The TtW GHG emission factors should be calculated using Equation (2):

$$GHG_{TtW} = \frac{1}{LCV} \left(\left(1 - \frac{1}{100} (C_{slip_ship} + C_{fug}) \right) \times (C_{fCO_2} \times GWP_{CO_2} + C_{fCH_4} \times GWP_{CH_4} + C_{fN_2O} \times GWP_{N_2O}) + \left(\frac{1}{100} (C_{slip_ship} + C_{fug}) \times C_{sfx} \times GWP_{fuelx} \right) - S_{Fc} \times e_c - S_{Fccu} \times e_{ccu} - e_{OCCS} \right) \quad \text{Equation (2)}$$

Note: Terms S_{Fccu} , e_{ccu} and e_{OCCS} are pending further methodological guidance to be developed by the Organization. For more details refer to footnotes 11 to 13.

MEPC 81/16/Add.1
Annex 10, page 10

Term	Units	Explanation
C_{slip_ship}	% of total fuel mass	Factor accounting for fuel (expressed in % of total fuel mass delivered to the ship) which escapes from the energy converter without being oxidized (including fuel that escapes from combustion chamber/oxidation process and from crankcase, as appropriate) $C_{slip_ship} = C_{slip} * (1 - C_{fug}/100)$
C_{slip}	% of total fuel mass	Factor accounting for fuel (expressed in % of total fuel mass consumed in the energy converter) which escapes from the energy converter without being oxidized (including fuel that escapes from combustion chamber/oxidation process and from crankcase, as appropriate)
C_{fug}	% of fuel mass	Factor accounting for the fuel (expressed in % of mass of the fuel delivered to the ship) which escapes between the tanks up to the energy converter which is leaked, vented or otherwise lost in the system ⁷
C_{sfx}	gGHG/g fuel	Factor accounting for the share of GHG in the components of the fuel (expressed in g GHG/g fuel) Example: for LNG this value is 1
C_{rCO2}	gCO ₂ /g fuel	CO ₂ emission conversion factor (gCO ₂ /g fuel completely combusted) for emissions of the combustion and/or oxidation process of the fuel used by the ship
C_{rCH4}	gCH ₄ /g fuel	CH ₄ emission conversion factor (gCH ₄ /g fuel delivered to the ship) for emissions of the combustion and/or oxidation process of the fuel used by the ship ⁸
C_{rN2O}	gN ₂ O/g fuel	N ₂ O emission conversion factor (gN ₂ O/g fuel delivered to the ship) for emissions of the combustion and/or oxidation process of the fuel used by the ship
GWP_{CH4}	gCO _{2eq} /g CH ₄	Global warming potential of CH ₄ over 100 years (based on the fifth IPCC Assessment Report 5) ⁹ Definition as per https://www.ipcc.ch/assessment-report/ar5/
GWP_{N2O}	gCO _{2eq} /g N ₂ O	Global warming potential of N ₂ O over 100 years (based on the fifth IPCC Assessment Report 5). ¹⁰ Definition as per https://www.ipcc.ch/assessment-report/ar5/
GWP_{fuelx}	gCO _{2eq} /g GHG	Global warming potential of GHG in the components of the fuel over 100 years (based on the fifth IPCC scientific Assessment Report)
S_{Fc}	0 or 1	Carbon source factor to determine whether the emissions credits generated by biomass growth are accounted for in the calculation of the TtW value
e_c	gCO _{2eq} /g fuel	Emissions credits generated by biomass growth

⁷ Pending further methodological guidance to be developed by the Organization to determine appropriate factor(s), the value of C_{fug} should be set to zero.

⁸ For LNG/CNG fuel, the C_{slip_engine} is covering the role of C_{rCH4} , so C_{rCH4} is set to zero for these fuels.

⁹ Set at 28 based on IPCC AR5.

¹⁰ Set at 265 based on IPCC AR5.

Term	Units	Explanation
e_{ccu} ¹¹	gCO _{2eq} /g fuel	Emission credits from the used captured CO ₂ as carbon stock to produce synthetic fuels in the fuel production process and utilization (that was not accounted under e_{fecu} and e_p)
S_{Fccu} ¹²	0 or 1	Carbon source factor to determine whether the emissions credits from the used captured CO ₂ as carbon stock to produce synthetic fuels in the fuel production process are accounted for in the calculation of the TtW value
e_{occs} ¹³	gCO _{2eq} / g fuel	Emission credit from carbon capture and storage (e_{occs}), where capture of CO ₂ occurs onboard. This should properly account for the emissions avoided through the capture and sequestration of emitted CO ₂ , if CCS occurs on board. From the above-mentioned emission credit, all the emissions resulting from the process of capturing (e_{cc}), and transporting (e_t) the CO ₂ up to the final storage (including the emissions related to the injection, etc.) need to be deducted. This element should be calculated with the following formula: $e_{occs} = c_{sc} - e_{cc} - e_t - e_{st} - e_x$
c_{sc}	gCO ₂ / g fuel	Credit equivalent to the CO ₂ captured and stored (long-term: 100 years)
e_{cc}	gCO _{2eq} / g fuel	Any emission associated with the process of capturing, compress and temporarily store on board the CO ₂
e_t	gCO _{2eq} / g fuel	Emissions associated with transport to long-term storage site
e_{st}	gCO _{2eq} / g fuel	Any emission associated with the process of storing (long-term: 100 years) the captured CO ₂ (including fugitive emissions that may happen during long-term storage and/or the injection of CO ₂ into the storage)
e_x	gCO _{2eq} / g fuel	Any additional emission related to the CCS
LCV	MJ/g	Lower Calorific Value is the amount of heat that would be released by the complete combustion of a specified fuel

5.3 In order to have LCA guidelines that will allow for their clear, robust and consistent application to any possible measure, the methodology allows to calculate two TtW values as follows:

- .1 TtW GHG intensity value 1: calculated regardless of the carbon source, therefore the e_c and e_{ccu} parameters should not be taken into account and the S_{Fc} and S_{Fccu} value should be always 0; and
- .2 TtW GHG intensity value 2: calculated taking into account the carbon source for fuels of biogenic origins or made from captured carbon, therefore the e_c and e_{ccu} parameters should be taken into account and the S_{Fc} and S_{Fccu} values should be always 1.

¹¹ Pending further methodological guidance to be developed by the Organization, the value of the multiplication $S_{Fccu} \times e_{ccu}$ should be set to zero.

¹² Pending further methodological guidance to be developed by the Organization, the value of the multiplication $S_{Fccu} \times e_{ccu}$ should be set to zero.

¹³ Pending further methodological guidance to be developed by the Organization, the value of e_{occs} should be set to zero.

5.4 The actual GHG intensity depends both on the properties of the fuel and on the efficiency of the energy conversion. For CO₂, the emission factors are based on the molar ratio of carbon to oxygen multiplied with the carbon mass of the fuel, assuming that all the carbon in the fuel is oxidized (stoichiometric combustion). The CH₄ and N₂O emissions factors are dependent on the combustion and/or conversion process in the energy converter.

5.5 For future use of, for example, fuel cells with a reforming unit, also electro-chemical reactions forming GHGs can be taken into account by this TtW methodology.

5.6 TtW default emission factors are provided in appendix 2 of these guidelines.

6 WELL-TO-WAKE (WtW)

6.1 The aim of the WtW methodology is to integrate WtT and TtW parts, to quantify the full life cycle emissions related to the production and use of a fuel.

6.2 The WtW GHG emission factor (gCO_{2eq}/MJ_{LCV} fuel or electricity) is calculated as follows:

Equation (3)

$$GHG_{WtW} = GHG_{WtT} + GHG_{TtW}$$

where:

Term	Units	Explanation
GHG_{WtW}	gCO _{2eq} /MJ _(LCV)	Total well-to-wake GHG emissions per energy unit from the use of the fuel or electricity in a consumer on board the ship
GHG_{WtT}	gCO _{2eq} /MJ _(LCV)	Total well-to-tank GHG upstream emissions per energy unit of the fuel provided to the ship
GHG_{TtW}	gCO _{2eq} /MJ _(LCV)	Total tank-to-wake GHG downstream emissions per energy unit from the use of the fuel or electricity in a consumer on board the ship

Equation (4)

$$GHG_{WtW} = e_{fecu} + e_l + e_p + e_{td} - e_{sca} - e_{ccs} + \frac{1}{LCV} \left(\left(1 - \frac{1}{100} (C_{slip_ship} + C_{fug}) \right) \times (C_{fCO_2} \times GWP_{CO_2} + C_{fCH_4} \times GWP_{CH_4} + C_{fN_2O} \times GWP_{N_2O}) + \left(\frac{1}{100} (C_{slip_ship} + C_{fug}) \times C_{sfx} \times GWP_{fuelx} \right) - S_{Fc} \times e_c - S_{Fccu} \times e_{ccu} - e_{occs} \right)$$

Note: terms S_{Fccu} , e_{ccu} and e_{occs} are pending further methodological guidance to be developed by the Organization. For more details refer to section 5.2.

6.3 For the purpose of calculating WtW, the TtW value 2 as calculated in accordance with paragraph 5.3.2 should be used.

7 SUSTAINABILITY

7.1 The sustainability of marine fuels should be assessed considering the following themes/aspects on a life cycle basis:

- .1 greenhouse gases (GHG);
- .2 carbon source;
- .3 source of electricity/energy;
- .4 carbon stock – direct land use change (DLUC);
- .5 carbon stock – indirect land use change (ILUC);
- .6 water;
- .7 air;
- .8 soil;
- .9 waste and chemicals; and
- .10 conservation.

Other social and economic sustainability themes/aspects may be considered at a later stage.

7.2 The principle/objective in conjunction with the associated metrics/indicators of each of the sustainability theme/aspect are specified below.

Table 1: Sustainability themes/aspects

Theme/aspect	Principle/Objective	Metric/Indicator
1. Greenhouse Gases (GHG)	Sustainable marine fuels generate lower GHG emissions than conventional marine fuels (energy-based weighted average of liquid petroleum products on 3 specific years of DCS data) on a life cycle basis.	1. GHG intensity in gCO _{2eq} /MJ (GWP100); and GHG intensity in gCO _{2eq} /MJ (GWP20) for comparative purposes.
2. Carbon source	Sustainable marine fuels do not increase GHG intensity from the use of fossil energy sources and the permanence of captured and stored carbon is ensured while also avoiding double counting across economic sectors.	1. Carbon source indicator, including its content (in %) and origin in feedstock used to produce final fuel product, i.e. Fossil, Biogenic, Captured Carbon (including direct air capture (DAC), point source fossil (PSF) and point source biogenic (PSB)), and Others (including mixture of sources).

Theme/aspect	Principle/Objective	Metric/Indicator
3. Source of electricity/energy	Sustainable marine fuels requiring significant electricity input during WtT phase and electricity delivered directly to ships are produced by using electricity/energy from renewable, nuclear or biogenic sources, which are additional to current or long-standing demand levels, or by using surplus electricity during off-peak hours.	1. The GHG intensity of electricity used in the production of marine fuels or delivered directly to ships (annual average, expressed in g CO _{2eq} /kWh based on total emissions and actual hours of production).
4. Carbon stock – direct land use change (DLUC)	Sustainable marine fuels are not made from biomass obtained from land with high carbon stock; production of sustainable marine fuels minimizes emissions resulting from Direct Land Use Change.	1. Sustainable marine fuel feedstock does not include biomass obtained from land with high carbon stock (e.g. primary forests, wetlands, or peat lands referred to a specific cut-off date for conversion), or a sustainable land management plan and reporting schedule are in place to ensure that the biomass is obtained from activities or ecosystem services that do not negatively impact the soil carbon stock; 2. The production of sustainable marine fuels does not occur in lands converted from primary forest, forestland, grassland or legally protected land, taking (1 January 2008) ¹⁴ as the cut-off date; and 3. Direct land-use change (DLUC) indicator, expressed in GHG (including CO ₂ , CH ₄ and N ₂ O emissions) intensity, i.e. mass of CO ₂ equivalent / MJ of production or yield of feedstock.

¹⁴ Pending further guidance to be developed by the Organization.

Theme/aspect	Principle/Objective	Metric/Indicator
5. Carbon stock – indirect land use change (ILUC)	Cultivation of feedstock of sustainable marine fuels minimizes inducing negative changes in the use or management of land which occurs outside the product system being assessed.	1. Indirect carbon stock risk associated with cultivation of feedstock for sustainable marine fuels (see paragraph 4.13).
6. Water	Production of sustainable marine fuels maintain or enhance water quality and availability.	<ol style="list-style-type: none"> 1. Operational practices are in place to (1) maintain water quality; and (2) use water efficiently and to avoid the depletion of water resources (including surface water, renewable water and fossil/underground water) beyond replenishment capacities; 2. Respect of decision-making of local population on water management; 3. Water environment impact (weighted water consumption on water scarcity); 4. Water Use Indicator expressed in m³/year per MJ or production or yield of feedstock; 5. Freshwater eutrophication indicator, e.g. expressed in kg of phosphorus equivalent (P_{eq}) and kg of nitrogen equivalent (N_{eq}) released to fresh water/kg of feedstock produced or per MJ respectively; and 6. Marine eutrophication indicator, e.g. expressed in kg of phosphorus equivalent (P_{eq}) and kg of nitrogen equivalent (N_{eq}) released to marine water/kg of feedstock produced or per MJ respectively.
7. Air	Production of sustainable marine fuels minimizes negative impacts on air quality.	1. The marine fuel is made in a facility that fully complies with all local, national and regional air pollution laws and regulations.

Theme/aspect	Principle/Objective	Metric/Indicator
8. Soil	Production of sustainable marine fuels maintain or enhance soil health.	<ol style="list-style-type: none"> 1. Agricultural and forestry best management practices for feedstock production or residue collection have been implemented to maintain or enhance soil health, such as physical, chemical and biological conditions; and 2. The marine fuel is made in a facility that fully complies with all local, national and regional laws and regulations about soil health.
9. Waste and chemicals	Production of sustainable marine fuels maintain or enhance responsible management of waste and use of chemicals.	<ol style="list-style-type: none"> 1. Operational practices are implemented to ensure that waste arising from, and chemicals used in, production processes are minimized at storage, handling and disposal steps. Reuse or recycling of chemicals and waste is encouraged. 2. Procedures are in place to minimize the use of materials that are neither recyclable nor biodegradable; 3. Average (in tonnes) of hazardous wastes generated per MJ of fuel produced; and 4. Average (in tonnes) of specified industrial chemicals consumed per MJ of fuel produced.

Theme/aspect	Principle/Objective	Metric/Indicator
10. Conservation	Production of sustainable marine fuels maintain or enhance biodiversity and ecosystems, or conservation services.	1. The marine fuel is not made from feedstock obtained from areas that due to their biodiversity, conservation value, or ecosystem services, are protected by the State having jurisdiction over the area. Evidence is provided that the activity does not interfere with the protection purposes; and 2. Low invasive-risk feedstock is selected for cultivation and appropriate controls are adopted with the intention of preventing the uncontrolled spread of cultivated alien species and modified microorganisms.

8 FUEL LIFECYCLE LABEL (FLL)

8.1 The FLL is a technical tool to collect and convey the information relevant for the life cycle assessment of marine fuels and energy carriers (e.g. electricity for shore power) used for ship propulsion and power generation onboard in the context of these guidelines.

8.2 The FLL consists of five main parts, as illustrated below:

Part A-1	Part A-2	Part A-3	Part A-4	Part A-5
Fuel type (blend)	Fuel Pathway Code	Lower Calorific Value (LCV, MJ/g)	share in fuel blend (%MJ _(LCV) / MJ _(LCV))	WtT GHG emission factor (GWP100, gCO _{2eq} /MJ _(LCV))
+				
Part B-1		(Part B-2)¹⁵		
Emissions credits related to biogenic carbon source (e_c , in gCO ₂ /g fuel based on GWP100)		Emissions credits related to source of captured carbon (e_{ccu} , in gCO ₂ /g fuel based on GWP100)		
+				
Part C-1		Part C-2		Part C-3
Value 1 (carbon source NOT taken into account): TtW GHG emission factor (GWP100, gCO _{2eq} /MJ _(LCV))		Value 2 (carbon source taken into account): TtW GHG emission factor (GWP100, gCO _{2eq} /MJ _(LCV))		Energy Converter
+				

¹⁵ Pending further methodological guidance to be developed by the Organization (see section 5).

Part D	Part E
WtW GHG emission factor (GWP100, $\text{gCO}_{2\text{eq}}/\text{MJ}_{(\text{LCV})}$) Note: Part D = Part A-5 + Part C-2	Sustainability (Certification) ¹⁶

8.3 Different parties (fuel suppliers, owners/operators, Administration/RO, etc.) may use different parts of the FLL for different purposes along the fuel pathway. As such, each interested party may use those parts of the FLL as relevant to their activities and purposes rather than the complete, integrated document.

8.4 The five main parts of the FLL are explained below.

.1 **Part A** of the FLL indicates:

- .1 fuel type (Part A-1);
- .2 fuel pathway code (Part A-2);
- .3 lower calorific value (Part A-3, in MJ/g); and
- .4 WtT GHG emission factor (Part A-5, in $\text{gCO}_{2\text{eq}}/\text{MJ}_{(\text{LCV})}$ calculated on GWP100).

Part A-4 is only applicable when a fuel batch is supplied to the ship as a blend of fuels with different fuel pathway code (hereinafter referred to as the "fuel blend") and indicates the share of each blend component in the fuel blend (in $\% \text{MJ}_{(\text{LCV})}/\text{MJ}_{(\text{LCV})}$). If fuel blends are denoted on volume-basis, a re-calculation on energy basis based on the LCV values of the blend components is required;

For the fuel blend supplied to a ship, the information on fuel type for the mixture is presented under Part A-1 on top of its components, named by percentual order of composition in the fuel, e.g. X (70%), Y (20%), Z (10%). Part A-5, Part C-1, Part C-2 and Part D are the average value weighted on energy share ($\% \text{MJ}_{(\text{LCV})} / \text{MJ}_{(\text{LCV})}$) of each fuel component, while Part A-2 to A-4, Part B and Part E are kept blank. Each component of the fuel blend with a specific fuel pathways code is presented in a separate row below the row for the fuel blend;

.2 **Part B** of the FLL indicates the carbon credits related to the carbon source, including:

- .1 e_c (Part B-1, in gCO_2/g fuel calculated on GWP100); (and
- .2 e_{ccu} (Part B-2, in gCO_2/g fuel calculated on GWP100)),¹⁷

as defined in section 5 of these Guidelines;

¹⁶ Pending further guidance to be developed by the Organization.

¹⁷ Pending further methodological guidance to be developed by the Organization. For more details on the e_{ccu} parameter and Part B-2 of the FLL, refer to sections 5.2 and 8.2, respectively.

- .3 **Part C** of the FLL indicates the TtW GHG emission factor of the fuel type in conjunction with the energy converter(s) on board the ship (Part C-3). The TtW GHG emission factor of the fuel type is further categorized as:
- .1 Value 1 where carbon source is not taken into account (Part C-1, in $\text{gCO}_{2\text{eq}}/\text{MJ}_{(\text{LCV})}$ calculated on GWP100); and
 - .2 Value 2 where carbon source is taken into account (Part C-2, in $\text{gCO}_{2\text{eq}}/\text{MJ}_{(\text{LCV})}$ calculated on GWP100),
- as defined in section 5 of these Guidelines;
- .4 **Part D** of the FLL indicates the WtW GHG emission factor of the fuel type (in $\text{gCO}_{2\text{eq}}/\text{MJ}_{(\text{LCV})}$ calculated on GWP100), which is always the sum of Part A-5 and Part C-2; and
- .5 **Part E** of the FLL indicates the sustainability performance of the fuel as per Section 7 of these Guidelines.

PART III: DEFAULT EMISSION FACTORS AND ACTUAL VALUES

9 DEFAULT EMISSION FACTORS

9.1 The principles and the procedure described for the determination of default emission factors under this section 9 have been used for the establishment of default emission factors and should remain valid for the factors that will be established.

9.2 WtT default emission factors should be calculated using representative and conservative assumptions, which encompass variable performance of feedstock-fuel pathways across world regions and States.

9.3 To establish a WtT default emission factor, at least three reference values from three different, representative, sources should be considered. Among the three (or more) values considered, the upper emission value should be selected as default, and the range of available emission factors should be provided for informative purposes. The reference values should be accompanied by the relevant technical and scientific information (see template set out in appendix 4) and evaluated against the corresponding information as appropriate, including the agreement between the reference values.

9.4 Emissions related to carbon stock changes caused by DLUC (e_l) and emissions savings from soil carbon accumulation via improved agricultural management (e_{sca}) are considered as zero for the establishment of the initial default emission factors. Similarly, this is the case also for the parameters related to carbon capture and storage (ccs), which require further development.

9.5 For the establishment of e_l and following IPCC (2019) and ISO 14067:2018 recommendations, the operators should use the following Equation (5) for the determination of e_l^{18} , measured as mass (g) of $\text{CO}_{2\text{eq}}$ per MJ of energy:

$$\text{Equation (5): } e_l = ((CS_{R,j} - CS_{A,j}) \times 3.664 + E_{nCO_2,j}) \times \frac{1}{n \times P}$$

¹⁸ Economic operators are expected to discriminate land types at the appropriate level of detail.

The terms refer to:

- $CS_{R,j}$ the carbon stock of the land type j per unit area associated with the reference land-use (measured as mass (g) of carbon per unit area (ha), including both soil and vegetation and dead organic matter). The reference land-use should be the land-use in January 2008 or 20 years before the raw material was obtained, whichever was the later;
- $CS_{A,j}$ the carbon stock of the land type j per unit area associated with the actual land-use (measured as mass (g) of carbon per unit area (ha), including both soil and vegetation and dead organic matter). In cases where the carbon stock accumulates over more than one year, the value attributed to CS_A should be the estimated stock per unit area after 20 years or when the crop reaches maturity, whichever the earlier;
- 3.664 the quotient obtained by dividing the molecular weight of CO_2 (44,010g/mol) by the molecular weight of carbon (12,011g/mol) in $gCO_2eq/g C$;
- n equal to 20, which corresponds to the number of years for amortization of the emissions in the IMO framework;
- P the productivity of the crop (measured as MJ of energy per ha per year); and
- E_{nCO_2j} emission factor for non- CO_2 emissions from biomass burned (measured as gCO_2eq per unit area (ha)), accounted in the equation only if the necessary information on area burned is available. Details of the E_{nCO_2j} formula should follow methodology to be defined.

9.6 According to existing standards, the CS_R and CS_A parameters have to be determined by means of direct measurements of soil carbon stocks, or calculated. CS_R and CS_A values, measured as mass (g) of carbon per unit area (ha), are obtained by considering:

$$CS_{R,j \text{ or } A,j} = SOC_j + C_{veg,j}$$

9.7 Where C_{veg} is the above and below ground carbon stock of the vegetation, including dead organic matter, measured as mass (g) of carbon per unit area (ha), which shall follow IPCC Guidelines. SOC parameter is the amount of soil organic carbon (measured as mass (g) of carbon per unit area (ha)) and consists of four factors, which depend on climate, soil type, management practice and C-input practice: the standard soil organic carbon in the topsoil layer (SOC_{ST}), the land use factor (F_{LU}), the management factor (F_{MG}) and the input factor (F_I).

Where:

$$SOC_j = (SOC_{ST,j} * F_{LU,j} * F_{MG,j} * F_{I,j})$$

9.8 Methods not based on measurements could be used as an alternative to calculate SOC with standard values, taking into account climate, soil type, land cover, land management and inputs.

9.9 Aggregation of areas: apply the same Equation (5) (e) on each type j of eligible land (e_j), as follow:

$$e_{lj} = \frac{e_l}{l_j} - e_{bj}$$

$$l_j = \frac{L_j \times y_j}{\sum_j L_j \times y_j}$$

Where:

- l_j is the land use share of type j ;
- e_b is the specific bonus, measured in terms of gCO₂eq per of energy if biomass is obtained from recovered severely degraded land. This parameter needs to be defined in further discussions and if there is consensus, the specific bonus will be subtracted from the equation;
- L_j is the area of each reference type of land j converted to feedstock cultivation, measured in hectare; and
- y_l is the yield of feedstock for each type of converted land j , measured in tons per hectare per year.

9.10 The operators should apply the following formula on all types of eligible land to calculate DLUC, in gCO₂ e/MJ:

$$e_l = \sum_j e_{lj} \times l_j$$

9.11 For the establishment of e_{sca} and following IPCC (2019) and ISO 14067:2018 recommendations, the equation that an operator should use for the determination of e_{sca} , measured as mass (g) of CO₂eq per MJ biofuel, is the following:

$$\text{Equation (6): } e_{sca} = (CS_{A,j} - CS_{R,j}) \times 3.664 \times \frac{1}{n \times P}$$

The terms refer to:

- $CS_{R,j}$ the mass of soil and vegetation carbon stock of the land type j per unit area associated with the reference crop management practice in g of C per ha in January 2008 or 20 years before the raw material was obtained;
- $CS_{A,j}$ the mass of soil and vegetation estimated carbon stock of the land type j per unit area associated with the actual crop management practices after at least 10 years of application in g of C per ha;
- 3.664 the quotient obtained by dividing the molecular weight of CO₂ (44,010g/mol) by the molecular weight of carbon (12,011g/mol) in g CO₂eq/g C;
- n equal to 20, which corresponds to the number of years for amortization of the emissions in the IMO framework; and
- P the productivity of the crop (measured as MJ biofuel per ha per year).

The emissions from the increased fertilizers or herbicide use, which may result from the specific agricultural practice, expressed in gCO₂eq per MJ biofuel, have to be properly accounted in the emissions associated with the feedstock extraction / cultivation / acquisition / recovery (e_{fecu}).

9.12 According to existing standards, the CS_R and CS_A parameter have to be determined by means of direct measurements of soil and vegetation carbon stocks or calculated by appropriate tools, accepted in the certification process. The CS_R and CS_A values, measured as mass (g) of carbon per unit area (ha), are obtained by considering:

$$CS_{R,j} \text{ or } A,j = SOC_j + C_{veg,j}$$

Where C_{veg} is the above and below ground carbon stock of the vegetation, including dead organic matter, measured as mass (g) of carbon per unit area (ha), according to IPCC Guidelines.

SOC is the amount of soil organic carbon, measured as mass (g) of carbon per unit area (ha).

Appropriate conversion is needed to obtain a final gCO₂eq/MJ of fuel.

9.13 Methods not based on measurements could be used as an alternative to calculate SOC with standard values, taking into account climate, soil type, land cover, land management and inputs. The IPCC Guidelines methodology can be applied for calculation of changes in carbon stocks. The adoption of improved agricultural management practices must be addressed under the IPCC "cropland remaining cropland" framework. The parameter consists of four factors, which depend on climate, soil type, management practice and C-input practice: the standard soil organic carbon in the topsoil layer (SOC_{ST}),¹⁹ the land use factor (F_{LU}), the management factor (F_{MG}) and the input factor (F_i). Deeper soil depths (i.e.: 1m or more) can be accepted in case of actual measurements of C stocks soil.

Where:

$$SOC_j = (SOC_{ST,j} * F_{LU,j} * F_{MG,j} * F_{i,j})$$

9.14 For aggregation of areas, the same Equation (6) (e_{sca}) should be applied on each type j of eligible land ($e_{sca,j}$), as follow:

$$e_{sca,j} = \frac{e_{sca}}{l_j}$$

$$l_j = \frac{L_j \times y_j}{\sum_j L_j \times y_j}$$

Where:

l_j is the land use share of type j ;

L_j is the area of each reference type of land j converted to feedstock cultivation, measured in hectare; and

¹⁹ Proper method to assess SOC_{ST} to be agreed with the certification scheme.

y_l is the yield of feedstock for each type of converted land j , measured in tonnes per hectare per year.

9.15 The following formula should be applied on all types of eligible land to calculate e_{sca} , in gCO₂e/MJ:

$$e_{sca} = \sum_j e_{sca,j} \times l_j$$

9.16 A non-exhaustive set of improved agriculture management practices, accepted for the purpose of achieving emission savings from soil carbon accumulation is listed below:

- .1 shifting to meaningful reductions in soil tillage;
- .2 improved crop/rotation schemes (i.e SOC increase);
- .3 multicropping, intercropping, and crop rotation;
- .4 integration systems of crop, livestock, and forestry;
- .5 the use of cover crops, including crop residue management;
- .6 the use of organic soil improver (e.g.: compost, digestate, biochar, etc.);
- .7 meaningful increase in soil coverage;
- .8 no till and reduced till;
- .9 sugarcane harvested without burning; and
- .10 structural measure to control soil erosion like contour farming.

9.17 TtW default emission factors should be calculated using representative and conservative assumptions, which encompass variable conditions onboard of the ships and performance of energy converters. The reference values used to establish default emission factors should be accompanied by the relevant technical and scientific information (see the template set out in appendix 5) and evaluated against the corresponding information as appropriate, including the agreement between the reference values.

9.18 For the establishment of C_{fCO_2} for fuels that can be represented using chemical formula, C_{fCO_2} emission factor can be calculated by dividing the molar ratio of carbon to CO₂ by the molar ratio of carbon to the fuel. If fuels cannot be represented using chemical formula, such as biofuels and fossil fuels, the C_{fCO_2} factor can be calculated using actual measurement of carbon content according to internationally recognized standards as ASTM D5291 and D6866, etc.

9.19 The C_{fCH_4} , C_{fN_2O} and C_{slip} emission factors depend on the type of fuel, engine and the engine load. In the case of existing fuels and existing engines, these factors can be obtained using reference values from the *Fourth IMO GHG Study 2020*.²⁰ However, for other types of fuels and engines, further work is needed to establish measurement procedures.

²⁰ <https://www.imo.org/en/ourwork/Environment/Pages/Fourth-IMO-Greenhouse-Gas-Study-2020.aspx>

9.20 Fugitive emissions are difficult to measure but the existing studies state they are very small in comparison to other GHG emissions. C_{fug} should be set as 0 (zero) until further evidence enabling the establishment of a value exists, nevertheless it should be kept as a placeholder for continuous review.

9.21 In case additional categories of energy converters (not listed in appendix 2) are proposed, the rules to establish TtW default emission factors as described in paragraph 9.17 above may be followed to ensure that these new converters (e.g. fuel cells) may also be associated with a default emission factor.

9.22 For aftertreatment/abatement systems, no default values should be established due to varying performance of this equipment, instead a superior GHG performance can be demonstrated through actual emission factors, subject to verification and certification by a third party.

9.23 For electricity delivered by Onshore Power Supply (OPS) the GHG intensity default value corresponds to the GHG intensity of the national grid. Considering that the GHG intensity national grid are frequently updated this information is not included in these guidelines and the following sources can be used, if the methodology is based in internationally recognized standards: governmental and utility sources, internationally acknowledged public databases, national inventories and national energy regulators.

10 ACTUAL EMISSION FACTORS

10.1 The aim of actual emission factors is to allow demonstration of superior GHG performance compared to the default emission factors, subject to verification and certification by a third party.

10.2 WtT and TtW emission factors should be based on methodologies established in these guidelines. Actual values provide the WtW (WtT and TtW) GHG intensity for the specific fuel over the life cycle (from fuel production to its use on board).

10.3 For the pathways contained in appendix 1, the description and the calculation method for providing WtT actual emission factors should be provided. In addition, for the pathways not contained in appendix 1, a detailed description of the pathway should be provided.

10.4 The use of actual WtT emission factors is not applicable to purely fossil pathways. However, for fuels which are produced from captured carbon of fossil origin and for fossil fuels where the technology of CCS/CCUS is applied, actual values are allowed. For the fossil component of a blended fuel, fossil fuel default emission factors should be used.

10.5 Actual TtW emission factors are allowed for all fuel pathways²¹ and provided in these guidelines. As mentioned in paragraphs 9.19 and 9.22, further work is needed to develop procedures to certify C_{fCH_4} , C_{fN_2O} and C_{fslip} emission factors, and to take in consideration aftertreatment/abatement systems.

10.6 Power Purchase Agreements (PPA) including a GHG intensity for electricity delivered by OPS can be used to certify an actual value if a procedure is in place to establish electricity GHG intensity and a certificate of the Guarantees of Origin, recognized by the Organization.

²¹ Verification and certification methodologies would need further work to be established.

PART IV: VERIFICATION AND CERTIFICATION

11 ELEMENTS SUBJECT TO VERIFICATION/CERTIFICATION

11.1 When used as evidence for performances, the FLL needs to be verified and certified by a third party, taking into account further guidance to be developed by the Organization.

11.2 The verification and certification of Part A, Part B, Part C and Part E of the FLL may be carried out separately by different verification bodies. The verification and certification of Part D of the FLL needs to be based on the verified Part A, Part B and Part C.

11.3 For fuel types with a specific fuel pathway code and which will be consumed in a specified energy converter, the default emission factors for Part A-5, Part C-1, Part C-2 and Part D of the FLL are provided in appendix 2. As long as Part A-1 to Part A-4 and Part C-3 of the FLL have been duly verified, the default emission factors contained in these guidelines can be consequently applied without further verification.

11.4 In the case where lower emission factors are claimed compared to the default emission factors for Part A-5, Part C-1, Part C-2 and/or Part D, the actual emission factors can be used only after the verification and certification by a third party, taking into account further guidance referred to in paragraph 11.1.

12 IDENTIFICATION OF CERTIFICATION SCHEMES/STANDARDS

12.1 The verification and certification of individual parts of the FLL will use relevant certification schemes/standards. Different parts of the FLL may be verified using different certification schemes/standards as applicable, while a specific part of the FLL may be addressed by multiple certification schemes/standards with similar scopes.

12.2 The certification schemes/standards used for the purposes specified in paragraph 12.1 above should be recognized by the Committee, taking into account guidance to be developed by the Organization. The list of recognized certification schemes/standards should be publicly available and kept under review.

12.3 Proposals to recognize international certification schemes/standards should be submitted to the Committee for consideration, including an assessment of a set of predetermined criteria which will be further developed for this purpose.

12.4 The framework, criteria and procedures leading to the recognition of certification schemes should be implemented uniformly to guarantee the quality, reliability and robustness of the IMO framework as a whole and to ensure a level playing field among certification schemes.

PART V: REVIEW

13 CONTINUOUS REVIEW PROCESS

13.1 To ensure that new technological advances and scientific knowledge are taken into account, these guidelines should be kept under continuous technical review taking into account emerging and evolving technologies.

13.2 In particular, the following elements should be kept under review:

- .1 WtT, TtW and WtW default emission factors as specified in appendix 2; and
- .2 new proposed fuel pathways and the corresponding default emission factors in addition to those specified in appendix 1.

APPENDIX 1

FUEL LIST WITH FUEL PATHWAY CODES

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
1	HFO (VLSFO)	Heavy Fuel Oil (ISO 8217 Grades RME, RMG and RMK, 0.10 < S ≤ 0.50%)	Crude Oil	Fossil	Standard refinery process	Grid mix electricity	HFO(VLSFO)_f_SR_gm
2	HFO (HSHFO)	Heavy Fuel Oil (ISO 8217 Grades RME, RMG and RMK exceeding 0.50% S)	Crude Oil	Fossil	Standard refinery process	Grid mix electricity	HFO(HSHFO)_f_SR_gm
3	LFO (ULSFO)	Light Fuel Oil (ISO 8217 Grades RMA, RMB and RMD maximum 0.10% S)	Crude Oil	Fossil	Standard refinery process	Grid mix electricity	LFO(ULSFO)_f_SR_gm
4	LFO (VLSFO)	Light Fuel Oil (ISO 8217 Grades RMA, RMB and RMD, 0.10 < S ≤ 0.50%)	Crude Oil	Fossil	Standard refinery process	Grid mix electricity	LFO(VLSFO)_f_SR_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
5	Diesel/Gas oil (ULSFO)	Marine Diesel/Gas Oil (ISO 8217 Grades DMX, DMA, DMZ and DMB maximum 0.10 % S)	Crude Oil	Fossil	Standard refinery process	Grid mix electricity	MDO/MGO(ULSFO)_f_SR_gm
6	Diesel/Gas oil (VLSFO)	Marine Diesel/Gas Oil (ISO 8217 Grades DMX, DMA, DMZ and DMB, 0.10 < S ≤ 0.50%)	Crude Oil	Fossil	Standard refinery process	Grid mix electricity	MDO/MGO(VLSFO)_f_SR_gm
7	Diesel/Gas oil (ULSFO)	Bio co-processed marine fuel (ISO 8217 Grades DMX, DMA, DMZ and DMB maximum 0.10 % S)	Crude Oil + mixed biomass	Fossil/Biogenic	CoProcessing (CP) in refinery	Grid mix electricity	MDO/MGO(ULSFO)_f_b_CP_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
8	Diesel/Gas oil (VLSFO)	Bio co-processed marine fuel (ISO 8217 Grades DMX, DMA, DMZ and DMB, 0.10 < S ≤ 0.50%)	Crude Oil + mixed biomass	Fossil/Biogenic	CoProcessing (CP) in refinery	Grid mix electricity	MDO/MGO(VLSFO)_f_b_CP_gm
9	Diesel/Gas oil (ULSFO)	Co-processed marine fuel (ISO 8217 Grades DMX, DMA, DMZ and DMB maximum 0.10 % S)	Crude Oil + recycled carbon	Fossil/Recycled carbon	CoProcessing (CP) in refinery	Grid mix electricity	MDO/MGO(ULSFO)_f_r_CP_gm
10	Diesel/Gas oil (VLSFO)	Co-processed marine fuel (ISO 8217 Grades DMX, DMA, DMZ and DMB, 0.10 < S ≤ 0.50%)	Crude Oil + recycled carbon	Fossil/Recycled carbon	CoProcessing (CP) in refinery	Grid mix electricity	MDO/MGO(VLSFO)_f_r_CP_gm
11	LPG ²²	Liquefied Petroleum Gas (Propane)	Crude Oil	Fossil	Standard refinery process and liquefaction	Grid mix electricity	LPG(Propane)_f_SR_gm

²² Regarding LPG, these Guidelines consider the final product from the refineries to be always liquefied.

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
12	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_fCO ₂ _fH ₂ _FT_gm
13	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture ²³ H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_fCO ₂ _rH ₂ _FT_gm
14	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_fCO ₂ _ibpH ₂ _FT_gm
15	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_rCO ₂ _fH ₂ _FT_gm

²³ CO₂: Fossil Point Source Carbon Capture includes captured CO₂ stemming from fuel combustion and captured CO₂ stemming from extraction of resources underground.

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
16	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_rCO ₂ _rH ₂ _F T_gm
17	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_rCO ₂ _ibpH ₂ _FT_gm
18	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_bCO ₂ _fH ₂ _F T_gm
19	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_bCO ₂ _rH ₂ _F T_gm
20	LPG	Liquefied Petroleum Gas (Propane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Propane)_bCO ₂ _ibpH ₂ _FT_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
21	LPG	Liquefied Petroleum Gas (Butane)	Crude Oil	Fossil	Standard refinery process and liquefaction	Grid mix electricity	LPG(Butane)_f_SR_gm
22	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_fCO ₂ _fH ₂ _FT_gm
23	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_fCO ₂ _rH ₂ _FT_gm
24	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_fCO ₂ _ibpH ₂ _FT_gm
25	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_rCO ₂ _fH ₂ _FT_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
26	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_rCO ₂ _rH ₂ _FT_gm
27	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_rCO ₂ _ibpH ₂ _FT_gm
28	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_bCO ₂ _fH ₂ _FT_gm
29	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_bCO ₂ _rH ₂ _FT_gm
30	LPG	Liquefied Petroleum Gas (Butane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis and liquefaction	Grid mix electricity	LPG(Butane)_bCO ₂ _ibpH ₂ _FT_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
31	LNG	Liquefied Natural Gas (Methane)	Natural Gas	Fossil	Standard LNG production including liquefaction	Grid mix electricity	LNG_f_SLP_gm
32	LNG	Liquefied Natural Gas (Methane)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Thermochemical gasification followed by methanation and liquefaction	Grid mix electricity	LNG_b_G_M_gm
33	LNG	Liquefied Natural Gas (Methane)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Bio-derived LNG via Anaerobic Digestion, separation and liquefaction	Grid mix electricity	LNG_b_AD_gm
34	LNG	Liquefied Natural Gas (Methane)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Bio-derived LNG via Anaerobic Digestion, separation with Point Source Carbon Capture (PSCC) and long-term storage and liquefaction	Grid mix electricity	LNG_b_AD_CCS_gm
35	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Methanation and liquefaction	Grid mix electricity	LNG_fCO ₂ _fH ₂ _M_gm
36	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : from Renewable electricity	Methanation and liquefaction	Grid mix electricity	LNG_fCO ₂ _rH ₂ _M_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
37	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Methanation and liquefaction	Grid mix electricity	LNG_fCO ₂ _ibpH ₂ _M_gm
38	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Fossil Steam Methane Reformation	Methanation and liquefaction	Grid mix electricity	LNG_rCO ₂ _fH ₂ _M_gm
39	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : from Renewable electricity	Methanation and liquefaction	Grid mix electricity	LNG_rCO ₂ _rH ₂ _M_gm
40	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Industrial by-product hydrogen	Methanation and liquefaction	Grid mix electricity	LNG_rCO ₂ _ibpH ₂ _M_gm
41	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Methanation and liquefaction	Grid mix electricity	LNG_bCO ₂ _fH ₂ _M_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
42	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : from Renewable electricity	Methanation and liquefaction	Grid mix electricity	LNG_bCO ₂ _rH ₂ _M_gm
43	LNG	Liquefied Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Methanation and liquefaction	Grid mix electricity	LNG_bCO ₂ _ibpH ₂ _M_gm
44	CNG	Compressed Natural Gas (Methane)	Natural Gas	Fossil	Standard refinery process and compression	Grid mix electricity	CNG_f_SR_gm
45	CNG	Compressed Natural Gas (Methane)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Thermochemical gasification followed by methanation and compression	Grid mix electricity	CNG_b_G_M_gm
46	CNG	Compressed Natural Gas (Methane)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Bio-derived LNG via Anaerobic Digestion and separation and compression	Grid mix electricity	CNG_b_AD_gm
47	CNG	Compressed Natural Gas (Methane)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Bio-derived LNG via Anaerobic Digestion, separation with Point Source Carbon Capture (PSCC) and long-term storage and compression	Grid mix electricity	CNG_b_AD_CCS_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
48	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Methanation and compression	Grid mix electricity	CNG_fCO ₂ _fH ₂ _M_gm
49	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : from Renewable electricity	Methanation and compression	Grid mix electricity	CNG_fCO ₂ _rH ₂ _M_gm
50	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Methanation and compression	Grid mix electricity	CNG_fCO ₂ _ibpH ₂ _M_gm
51	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Fossil Steam Methane Reformation	Methanation and compression	Grid mix electricity	CNG_rCO ₂ _fH ₂ _M_gm
52	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : from Renewable electricity	Methanation and compression	Grid mix electricity	CNG_rCO ₂ _rH ₂ _M_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
53	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Industrial by-product hydrogen	Methanation and compression	Grid mix electricity	CNG_rCO ₂ _ibpH ₂ _M_gm
54	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Methanation and compression	Grid mix electricity	CNG_bCO ₂ _fH ₂ _M_gm
55	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : from Renewable electricity	Methanation and compression	Grid mix electricity	CNG_bCO ₂ _rH ₂ _M_gm
56	CNG	Compressed Natural Gas (Methane)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Methanation and compression	Grid mix electricity	CNG_bCO ₂ _ibpH ₂ _M_gm
57	Ethane	Ethane	Natural Gas	Fossil	Standard refinery process	Grid mix electricity	Ethane_f_SR_gm
58	Vegetable oil-based fuel	Straight Vegetable Oil	1st Gen. feedstock	Biogenic	Extraction and purification	Grid mix electricity	SVO_b_EP_1stgen_gm
59	Vegetable oil-based fuel	Used oils and fats	2nd Gen. feedstock	Biogenic	Extraction and purification	Grid mix electricity	UOF_b_EP_2ndgen_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
60	Vegetable oil-based fuel	Algae oil	3rd Gen. feedstock	Biogenic	Extraction and purification	Grid mix electricity	AO_b_EP_3rdgen_gm
61	Diesel	Diesel (FAME)	1st Gen. feedstock	Biogenic	Transesterification	Grid mix electricity	FAME_b_TRE_1stgen_gm_
62	Diesel	Diesel (FAME)	2nd Gen. feedstock	Biogenic	Transesterification	Grid mix electricity	FAME_b_TRE_2ndgen_gm_
63	Diesel	Diesel (FAME)	3rd Gen. feedstock	Biogenic	Transesterification	Grid mix electricity	FAME_b_TRE_3rdgen_gm_
64	Diesel	Renewable Diesel (Bio FT-Diesel)	1st Gen. feedstock	Biogenic	Gasification and Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_b_G_FT_1stgen_gm_
65	Diesel	Renewable Diesel (Bio FT-Diesel)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Anaerobic digestion and methane separation and Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_b_AD_FT_gm
66	Diesel	Renewable Diesel (Bio FT-Diesel)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Anaerobic digestion and methane separation and Fischer-Tropsch Synthesis with Point Source Carbon Capture (PSCC) and long-term storage	Grid mix electricity	FT-Diesel_b_AD_FT_CCS_gm
67	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_fCO ₂ _fH ₂ _FT_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
68	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_fCO ₂ _rH ₂ _FT_gm
69	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_fCO ₂ _ibpH ₂ _FT_gm
70	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_rCO ₂ _fH ₂ _FT_gm
71	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_rCO ₂ _rH ₂ _FT_gm
72	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_rCO ₂ _ibpH ₂ _FT_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
73	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_bCO ₂ _fH ₂ _FT_gm
74	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : from Renewable electricity	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_bCO ₂ _rH ₂ _FT_gm
75	Diesel	Renewable Diesel (FT-Diesel)	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Fischer-Tropsch Synthesis	Grid mix electricity	FT-Diesel_bCO ₂ _ibpH ₂ _FT_gm
76	Diesel	Renewable Diesel (HVO)	1st Gen. feedstock	Biogenic	Hydrogenation	Grid mix electricity	HVO_b_HD_1stgen_gm_
77	Diesel	Renewable Diesel (HVO)	2nd Gen. feedstock	Biogenic	Hydrogenation	Grid mix electricity	HVO_b_HD_2ndgen_gm_
78	Diesel	Renewable Diesel (HVO)	3rd Gen. feedstock	Biogenic	Hydrogenation	Grid mix electricity	HVO_b_HD_3rdgen_gm_
79	DME	Dimethyl Ether (DME)	1st Gen. feedstock	Biogenic	Gasification and DME Synthesis	Grid mix electricity	DME_b_G_DMES_1stgen_gm_
80	DME	Dimethyl Ether (DME)	2nd Gen. feedstock	Biogenic	Gasification and DME Synthesis	Grid mix electricity	DME-b-G-DMES_2ndgen_gm_

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
81	DME	Dimethyl Ether (DME)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Anaerobic digestion and methane separation and DME Synthesis	Grid mix electricity	DME_b_AD_DMES_gm
82	DME	Dimethyl Ether (DME)	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Anaerobic digestion and methane separation and DME Synthesis with Point Source Carbon Capture (PSCC) and long-term storage	Grid mix electricity	DME_b_AD_DMES_CCS_gm
83	DME	Dimethyl Ether (DME)	Natural Gas	Fossil	Gasification and DME Synthesis	Grid mix electricity	DME_f_G_DMES_gm
84	Diesel	Upgraded Pyrolysis Oil	2nd Gen. feedstock	Biogenic	Pyrolysis, Fast Pyrolysis and/or Catalytic Fast Pyrolysis and upgrading	Grid mix electricity	UPO_b_UPO_2ndgen_gm_
85	Diesel	Hydrothermal Liquefaction (HTL) Oil	2nd Gen. feedstock	Biogenic	Hydrothermal liquefaction and upgrading	Grid mix electricity	HTL_b_HTL_2ndgen_gm_
86	Methanol	Methanol	Natural Gas	Fossil	Steam Methane Reformation of Natural Gas and Methanol Synthesis	Grid mix electricity	MeOH_f_SMR_gm
87	Methanol	Methanol	Natural Gas	Fossil	Steam Methane Reformation of Natural Gas with Carbon Capture & Storage and Methanol Synthesis	Grid mix electricity	MeOH_f_SMR_CCS_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
88	Methanol	Methanol	Coal	Fossil	Gasification of Coal and Methanol Synthesis	Grid mix electricity	MeOH_f_G_MS_gm
89	Methanol	Methanol	Coal	Fossil	Gasification of Coal with Carbon Capture & Storage and Methanol Synthesis	Grid mix electricity	MeOH_f_G_MS_CCS_gm
90	Methanol	Methanol	2nd and 3rd Gen. feedstock	Biogenic	Gasification of Biomass and Methanol Synthesis	Grid mix electricity	MeOH_b_G_MS_gm
91	Methanol	Methanol	Mixed 1st, 2nd and 3rd Gen. feedstock	Biogenic	Reforming of Renewable Natural Gas (biomethane from Anaerobic Digestion) and Methanol Synthesis	Grid mix electricity	MeOH_b_AD_MS_gm
92	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Methanol Synthesis	Grid mix electricity	MeOH_fCO ₂ _fH ₂ _MS_gm
93	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : from Renewable electricity	Methanol Synthesis	Grid mix electricity	MeOH_fCO ₂ _rH ₂ _MS_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
94	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Fossil Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Methanol Synthesis	Grid mix electricity	MeOH_fCO ₂ _ibpH ₂ _MS_gm
95	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Fossil Steam Methane Reformation	Methanol Synthesis	Grid mix electricity	MeOH_rCO ₂ _fH ₂ _MS_gm
96	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : from Renewable electricity	Methanol Synthesis	Grid mix electricity	MeOH_rCO ₂ _rH ₂ _MS_gm
97	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Direct Air Capture H ₂ : Industrial by-product hydrogen	Methanol Synthesis	Grid mix electricity	MeOH_rCO ₂ _ibpH ₂ _MS_gm
98	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Fossil Steam Methane Reformation	Methanol Synthesis	Grid mix electricity	MeOH_bCO ₂ _fH ₂ _MS_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
99	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : from Renewable electricity	Methanol Synthesis	Grid mix electricity	MeOH_bCO ₂ _rH ₂ _MS_gm
100	Methanol	Methanol	CO ₂ + H ₂	CO ₂ : Biogenic Point Source Carbon Capture H ₂ : Industrial by-product hydrogen	Methanol Synthesis	Grid mix electricity	MeOH_bCO ₂ _ibpH ₂ _MS_gm
101	Ethanol	Ethanol	1st Gen. feedstock	Biogenic	Fermentation	Grid mix electricity	EtOH_b_FR_1stgen_gm_
102	Ethanol	Ethanol	2nd Gen. feedstock	Biogenic	Pretreatment/hydrolysis step and Fermentation	Grid mix electricity	EtOH_b_FR_2ndgen_gm_
103	Ethanol	Ethanol	3rd Gen. feedstock	Biogenic	Fermentation	Grid mix electricity	EtOH_b_FR_3rdgen_gm_
104	Hydrogen	Hydrogen	Natural Gas	Fossil	Steam Methane Reformation of Natural Gas	Grid mix electricity	H ₂ _f_SMR_gm
105	Hydrogen	Hydrogen	Natural Gas	Fossil	Steam Methane Reformation of Natural Gas with Carbon Capture and long-term storage	Grid mix electricity	H ₂ _f_SMR_CCS_gm
106	Hydrogen	Hydrogen	Natural Gas	Fossil	Methane Pyrolysis into carbon and hydrogen	Grid mix electricity	H ₂ _f_MPO_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
107	Hydrogen	Hydrogen	Coal	Fossil	Gasification or Carbonization of Coal	Grid mix electricity	H2_f_G_gm
108	Hydrogen	Hydrogen	Coal	Fossil	Gasification or Carbonization of Coal with Carbon Capture and long-term storage	Grid mix electricity	H2_f_G_CCS_gm
109	Hydrogen	Hydrogen	2nd Gen. feedstock	Biogenic	Gasification of biomass and Syngas separation with Point Source Carbon Capture (PSCC) and long-term storage	Grid mix electricity	H2_b_G_SS_CCS_2ndgen_gm
110	Hydrogen	Hydrogen	Water + Electricity	Renewable	Dedicated Photovoltaic and/or Wind and/or other Electrolysis and liquefaction	Renewable electricity	LH2_EL_r_Liquefied
111	Hydrogen	Hydrogen	Water + Electricity	Fossil/Renewable	Electrolysis and liquefaction	Grid mix electricity	LH2_EL_gm_Liquefied
112	Hydrogen	Hydrogen	Water + Electricity	Nuclear	Thermochemical Cycles or Electrolysis and liquefaction	Nuclear	LH2_EL_n_Liquefied
113	Hydrogen	Hydrogen		Industrial by-product hydrogen		Grid mix electricity	LH2__ibp_gm_Liquefied
114	Ammonia	Ammonia	Natural Gas	Fossil	Methane Pyrolysis into pure carbon and hydrogen and Haber Bosch process	Grid mix electricity	NH3_f_MPO_HB_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
115	Ammonia	Ammonia	Natural Gas	Fossil	Steam Methane Reformation of Natural Gas and Haber Bosch process	Grid mix electricity	NH3_f_SMR_HB_gm
116	Ammonia	Ammonia	Natural Gas	Fossil	Steam Methane Reformation of Natural Gas with Point Source Carbon Capture (PSCC) and long-term storage and Haber Bosch process	Grid mix electricity	NH3_f_SMR_HB_CCS_gm
117	Ammonia	Ammonia	Coal	Fossil	Gasification of Coal and Haber Bosch process	Grid mix electricity	NH3_f_G_HB_gm
118	Ammonia	Ammonia	Coal	Fossil	Gasification of Coal with Carbon Capture and long-term storage and Haber Bosch process	Grid mix electricity	NH3_f_G_HB_CCS_gm
119	Ammonia	Ammonia	2nd Gen. feedstock	Biogenic	Gasification	Grid mix electricity	NH3_b_G_2ndgen_gm_
120	Ammonia	Ammonia	N2 + H2	N2: separated with renewable electricity H2: produced from renewable electricity	Haber Bosch process	Grid mix electricity	NH3_rN2_rH2_HB_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
121	Ammonia	Ammonia	N2 + H2	N2: separated with renewable electricity H2: Fossil Steam Methane Reformation	Haber Bosch process	Grid mix electricity	NH3_rN2_fH2_HB_gm
122	Ammonia	Ammonia	N2 + H2	N2: separated with renewable electricity H2: Industrial by-product hydrogen	Haber Bosch process	Grid mix electricity	NH3_rN2_ibpH2_HB_gm
123	Ammonia	Ammonia	N2 + H2	N2: separated with grid mix electricity H2: Fossil Steam Methane Reformation	Thermochemical Cycles or Electrolysis	Nuclear	NH3_gmN2_fH2_EL_n
124	Ammonia	Ammonia	N2 + H2	N2: separated with grid mix electricity H2: produced from renewable electricity	Thermochemical Cycles or Electrolysis	Nuclear	NH3_gmN2_rH2_EL_n
125	Ammonia	Ammonia	N2 + H2	N2: separated with grid mix electricity H2: Industrial by-product hydrogen	Thermochemical Cycles or Electrolysis	Nuclear	NH3_gmN2_ibpH2_EL_n
126	Electricity	Electricity		Fossil/Renewable	-	Grid mix electricity	Electricity_gm

Order	Group	Fuel type	Feedstock structure		Conversion/Production process		Fuel Pathway Code
			Feedstock Type	Nature/Carbon Source	Process Type	Energy used in the process	
127	Electricity	Electricity		Renewable	Dedicated Photovoltaic and/or Wind and/or other	Renewable electricity	Electricity_renewable
128	Wind propulsion						

APPENDIX 2

INITIAL DEFAULT EMISSION FACTORS PER FUEL PATHWAY CODE

Order	Fuel type	Fuel Pathway Code	WtT GHG intensity (gCO ₂ eq/MJ)	LCV (MJ/g)	Energy Converter	C _f CO ₂ (gCO ₂ /g fuel)	C _f CH ₄ (gCH ₄ /g fuel)	C _f N ₂ O (gN ₂ O/g fuel)	C _{slip} /C _{fug} (mass %)	e _c gC O ₂ eq/g fuel	TtW GHG intensity (gCO ₂ eq/MJ)	NOTE
1	Heavy Fuel Oil (ISO 8217 Grades RME, RMG and RMK, 0.10 < S ≤ 0.50%)	HFO(VLSFO)_f_SR_gm	16.8	0.0402	ALL ICEs	3.114	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study
2	Heavy Fuel Oil (ISO 8217 Grades RME, RMG and RMK exceeding 0.50% S)	HFO(HSHFO)_f_SR_gm	14.1	0.0402	ALL ICEs	3.114	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study
3	Light Fuel Oil (ISO 8217 Grades RMA, RMB and RMD maximum 0.10% S)	LFO(ULSFO)_f_SR_gm		0.0412	ALL ICEs	3.151	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study
4	Light Fuel Oil (ISO 8217 Grades RMA, RMB and RMD, 0.10 < S ≤ 0.50%)	LFO(VLSFO)_f_SR_gm		0.0412	ALL ICEs	3.151	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study

Order	Fuel type	Fuel Pathway Code	WtT GHG intensity (gCO _{2eq} /MJ)	LCV (MJ/g)	Energy Converter	C _f CO ₂ (gCO ₂ /g fuel)	C _f CH ₄ (gCH ₄ /g fuel)	C _f N ₂ O (gN ₂ O/g fuel)	C _{slip} /C _{fug} (mass %)	e _c gC O _{2eq} /g fuel	TtW GHG intensity (gCO _{2eq} /MJ)	NOTE
5	Marine Diesel/Gas Oil (ISO 8217 Grades DMX, DMA, DMZ and DMB maximum 0.10 % S)	MDO/MGO(U LSFO)_f_SR_gm	17.7	0.0427	ALL ICEs	3.206	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study
6	Marine Diesel/Gas Oil (ISO 8217 Grades DMX, DMA, DMZ and DMB, 0.10 < S ≤ 0.50%)	MDO/MGO(VL SFO)_f_SR_gm		0.0427	ALL ICEs	3.206	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study
11	Liquefied Petroleum Gas (Propane)	LPG(Propane)_f_SR_gm		0.0463	ALL ICEs	3.000	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study
21	Liquefied Petroleum Gas (Butane)	LPG(Butane)_f_SR_gm		0.0457	ALL ICEs	3.030	0.00005	0.00018				Resolution MEPC.364(79) Fourth IMO GHG study

Order	Fuel type	Fuel Pathway Code	WtT GHG intensity (gCO _{2eq} /MJ)	LCV (MJ/g)	Energy Converter	C _f CO ₂ (gCO ₂ /g fuel)	C _f CH ₄ (gCH ₄ /g fuel)	C _f N ₂ O (gN ₂ O/g fuel)	C _{slip} /C _{fug} (mass %)	e _c gCO _{2eq} /g fuel	TtW GHG intensity (gCO _{2eq} /MJ)	NOTE
31	Liquefied Natural Gas (Methane)	LNG_f_SLP_gm		0.0480	LNG Otto (dual fuel medium speed)	2.750	0	0.00011	3.5/-			Resolution MEPC.364(79) Fourth IMO GHG study
					LNG Otto (dual fuel slow speed)				1.7/-			
					LNG Diesel (dual fuel slow speed)				0.15/-			
					LBSI (Lean-Burn Spark-Ignited)				2.6/-			
					Steam Turbines and boilers				0.01/-			

Order	Fuel type	Fuel Pathway Code	WtT GHG intensity (gCO _{2eq} /MJ)	LCV (MJ/g)	Energy Converter	C _f CO ₂ (gCO ₂ /g fuel)	C _f CH ₄ (gCH ₄ /g fuel)	C _f N ₂ O (gN ₂ O/g fuel)	C _{slip} /C _{fug} (mass %)	e _c gCO _{2eq} /g fuel	TtW GHG intensity (gCO _{2eq} /MJ)	NOTE
33	Liquefied Natural Gas (Methane)	LNG_b_AD_gm			LNG Otto (dual fuel medium speed)	2.750						
					LNG Otto (dual fuel slow speed)							
					LNG Diesel (dual fuel slow speed)							
					LBSI (Lean-Burn Spark-Ignited)							
					Steam Turbines and boilers							
62	Diesel (FAME)	FAME_b_TRE_gm_2ndgen	20.8	0.0372	ALL ICES							
77	Renewable Diesel (HVO)	HVO_b_HD_gm_2ndgen	14.9	0.044	ALL ICES							

Order	Fuel type	Fuel Pathway Code	WtT GHG intensity (gCO _{2eq} /MJ)	LCV (MJ/g)	Energy Converter	C _f CO ₂ (gCO ₂ /g fuel)	C _f CH ₄ (gCH ₄ /g fuel)	C _f N ₂ O (gN ₂ O/g fuel)	C _{slip} /C _{fug} (mass %)	e _c gCO _{2eq} /g fuel	TtW GHG intensity (gCO _{2eq} /MJ)	NOTE
105	Hydrogen	H2_f_SMR_CS_gm		0.12	ALL ICES	0						
					Fuel cell							
121	Ammonia	NH3_rN2_fH2_HB_gm		0.0186	ALL ICES	0						
					Fuel cell							

APPENDIX 3

ABBREVIATIONS AND GLOSSARY

Abbreviations

AR – IPCC Assessment Report
BDN – Bunkering Delivery Note
 C_f – Emission conversion factors $C_{fCO_2/CH_4/N_2O}$ (g GHG (CO₂/CH₄/N₂O)/g fuel) for emissions of the combustion and/or oxidation process, including the fuel with relevant GWP effect resulting from the combustion energy conversion
CH₄ – Methane
CO₂ – Carbon dioxide
CO_{2eq} – Carbon dioxide equivalent
CCS – Carbon Capture and Storage
CCU – Carbon Capture and Utilization
DAC – Direct Air Capture
DCS – IMO ship fuel oil consumption Data Collection System
DLUC – Direct Land Use Change
FLL – Fuel Lifecycle Label
GHG – Greenhouse gas
GWP – Global Warming Potential
ILUC – Indirect Land Use Change
IPCC – Intergovernmental Panel on Climate Change
LCA – Life Cycle Assessment
LCV – Lower Calorific Value (MJ/g fuel)
NMVOC – Non-Methane Volatile Organic Compounds
N₂O – Nitrous oxide
NTC – NO_x Technical Code
RFNBO – Renewable Fuels of Non-Biological Origin
SLCF – Short-Lived Climate Forcers
TtW – Tank-to-Wake
WtT – Well-to-Tank
WtW – Well-to-Wake
VOC – Volatile Organic Compounds
OPS – Onshore Power Supply

Glossary

Co-product – an outcome of a production process, which has a relevant economic value and elastic supply (intended as the existence of a clear evidence of the causal link between feedstock market value and the quantity of feedstock that can be produced).

Biomass – biomass is renewable organic material that comes from plants and animals.

Renewables – any form of energy from solar, geophysical or biological sources that is replenished by natural processes at a rate that equals or exceeds its rate of use. Renewables are obtained from the continuing or repetitive flows of energy occurring in the natural environment and includes low-carbon technologies such as solar energy, hydropower, wind, tide and waves and ocean thermal energy, as well as renewable fuels such as biomass.

Global Warming Potential – global warming potential indicates the potential of a greenhouse gas to trap extra heat in the atmosphere over time in relation to carbon dioxide. The enhanced heat trapping in the atmosphere (i.e. the "greenhouse effect") is caused by the absorption of

infrared radiation by a given gas. The GWP also depends on the atmospheric lifetime of a gas, and the time-horizon considered (for example, GWP20 is based on the energy absorbed over 20 years, whereas GWP100 is based on the energy absorbed over 100 years). Each greenhouse gas has a specific global warming potential which is used to calculate the CO₂-equivalent (CO_{2eq}).

Land Use Change – Production of bio-based fuels leads to land use change (LUC). LUC can be classified as direct LUC (DLUC) and indirect LUC (ILUC).

Life Cycle Assessment (LCA) framework – life cycle assessment determines the potential environmental impacts of products, processes or services from cradle to grave, e.g. from acquisition/extraction of raw materials through to processing, transport, use and disposal.

System boundaries – The system boundary determines which entities (unit processes) are inside the system and which are outside. It essentially determines which life cycle/supply chain stages and processes are included in the assessment and need to be in accordance with the goal and scope of the study.

System expansion – ISO 14040 recommends the use of system expansion whenever possible. System expansion is part of the consequential LCA method that seeks to capture change in environmental impact as a consequence of a certain activity.

Well-to-Wake – WtW studies estimate the energy requirements and the resulting greenhouse gas (GHG) emissions in the production of a fuel and its use in a ship, based on the broader life cycle assessment (LCA) methodology. The term 'Well' is used for fuels from all sources, because although the term is most applicable to conventional crude oil resources, it is widely used and understood.

Onshore power supply – the system to supply electricity to ships at berth, at low or high voltage, alternate or direct current, including ship-side and port-side installations, when feeding any of the ship's electrical distribution switchboards for powering hotel and service workloads or charging secondary batteries

APPENDIX 4

TEMPLATE FOR WELL-TO-TANK DEFAULT EMISSION FACTOR SUBMISSION

INTRODUCTION

1 This template aims at collecting and presenting in a clear and structured manner the input data used to calculate a "default emission factor" for a specific "feedstock-to-fuel" pathway according to the methodology of the *2024 Guidelines on Life Cycle GHG Intensity of Marine Fuels (2024 LCA Guidelines)*, adopted on 22 March 2024 through resolution MEPC.391(81).¹ Only one default emission factor should be proposed per template form, i.e. to propose two emission default factors, two separate template forms should be filled. A "default emission factor" represents the quantitative results of the assessed greenhouse gas intensity (gCO_{2eq}/MJ) of a feedstock-to-fuel value chain. The default emission factor is not meant to represent the best available way to produce a fuel. It is a value describing a feedstock production, collection and transportation for conversion to an average/typical/standard plant, located in a generic region.²⁴ A default emission factor does not have to capture process improvement, with respect to current production, nor innovative technologies.²⁵ The goal of default emission factor is, at least, twofold:

- .1 allow for fair comparison of GHG intensity among different technologies and fuel conversion pathways, where emissions resulting from some of the parameters in the WtT equation are set at zero by default (i.e. e_{sca} , e_l , e_{ccs}); In other words, allow for a general comparison among different fuel options and technologies;
- .2 allow for operators to demonstrate actual life cycle of greenhouse gas emissions compared to the default life cycle emissions for the same feedstock-to-fuel pathway, through a certification process. The period of validity for the certification should be defined along with the rules and procedures of functioning of the certification.

The template provides full coverage of all elements necessary to define a default emission factor. It can be adapted (e.g. by not providing input data to each and every element it comprises) and complemented with additional information.

The LCA Guidelines specify in paragraph 4.4 that the WtT GHG emission factor (gCO_{2eq}/MJ(LCV) fuel or electricity) is calculated according to Equation (1).

$$\text{Equation (1) } GHG_{WtT} = e_{fecu} + e_l + e_p + e_{td} - e_{sca} - e_{ccs}$$

while paragraph 9.4 specifies that "Emissions related to carbon stock changes caused by direct land-use change (DLUC) (e_l) and emissions savings from soil carbon accumulation via improved agricultural management (e_{sca}) are considered as zero for the establishment of the default emission factors. Similarly, this is the case also for the parameters related to carbon capture and storage (CCS), which require further development." Accordingly, it should be noted that the default emission factors identified through the use of this submission template

²⁴ Default emission factors reflect the performance of feedstock-fuel pathways across world regions and States. Project-specific values certified according to relevant procedures agreed and adopted at IMO can be used as actual emission factors.

²⁵ In case of immature technologies, literature and modelling sources could be used, limited to the conversion process. However, the principle that this could be used as input data to refine/complete/revise emission factors as a future technology matures should be kept.

will only be partially reflective of WtT emissions attributable to any given "feedstock-to-fuel" pathway and may vary as emissions by sources and/or removals by sinks within the system boundary are taken into account.

2 Once default emission factors fully reflecting WtT GHG emissions are developed in a future iteration of the LCA Guidelines, operators (e.g. fuel producers) that are in a position to prove actual GHG emissions, may seek certification for a project certified "actual value". Certified actual values may also be used for pathways not having a default WtT GHG emission factor listed in appendix 2 of the LCA Guidelines.

3 This template allows indicating a 0 (zero) value for elements of Equation (1) that are temporarily not quantified as explained in paragraph 1 above. Data submitted as required for the calculation of default WtT GHG emission factors, need to ensure quality in terms of: relevance,²⁶ adequacy,²⁶ completeness,²⁷ consistency,²⁸ reliability,²⁹ transparency and accessibility.³⁰ The template can also be partially completed, e.g. by providing data for specific steps of the pathway.

PATHWAY DESCRIPTION

4 This section should clearly present the pathway modelled, intended as the value chain related to the production of a finished fuel, with the aim for providing at least information on inter alia: the type of feedstock used, a description of the technology used for converting such feedstock in the final fuel, and any other relevant information that affects the calculation of emission factors, consistently with the system boundary of the LCA guidelines.

5 The default emission factors are based on the WtT methodology, aiming at evaluating the amount of GHG emissions attributable to the fuel production and distribution. The production steps to be included in the calculation of a WtT emission factor are shown in figure 2 below:

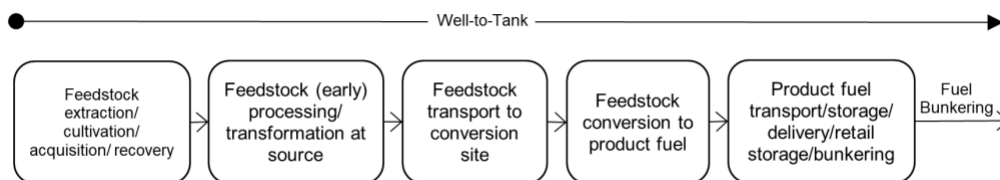


Figure 2 – Generic well-to-tank supply chain

The system boundaries defined for describing a specific feedstock-to-fuel pathway shall be in line with the definitions contained in the LCA guidelines.

Additional details and relevant information may be added in appendices, such as, production region, production capacity, age, etc. of facility or facilities.

²⁶ Is the available data appropriate and reasonable in relation to the goal?

²⁶ Does the data accurately describe the value chain under investigation? Are the uncertainties properly reported?

²⁷ How completely does the data describe the value chain under investigation?

²⁸ Is the data internally consistent? If there are redundant data values, do they have the same value?

²⁹ Is the data regarded as valid/verifiable by the stakeholders?

³⁰ Can the data be accessed and verified by a third party?

INPUT DESCRIPTION

- 6 This section should clearly present the input used for the modelling exercise.
- 7 The source of the data and of the model used should be reported, according to the indications about data quality provided in the LCA Guidelines.
- 8 Please inform if the LCA calculation has been developed in a particular modelling tool and in case of a positive answer, inform if any background information (information not listed below) has changed with respect to the standard data set and/or methodology used by the tool, and provide adequate justification for such change.
- 9 In order to provide guidance to fill the template, please see a worked example for a lipid feedstock production and conversion. The worked example is comprised of filled-in tables as necessary to report data, per pathway.

Table 1: e_{fecu} inputs and outputs for XXX feedstock

				XXXX, per dry kg	Data source/Model used	Observations		
e_{fecu}	XXX feedstock	Agricultural Inputs	Total N (g)	...	zzz et al. 2010	(explicit the type of N fertilizer, in %. Example: Total N is represented by 50% of Urea, 30% of Ammonium Nitrate, and 20%of..)		
			P ₂ O ₅ (g)	...	ecoinvent	(explicit the type of P ₂ O ₅ fertilizer)		
			K ₂ O (g)	...	GREET	(explicit the type of K ₂ O fertilizer)		
			Diesel (MJ)			
			Fugitive GHG emissions (e.g. CH ₄) at feedstock extraction			
		per kg XXXX oil						
					Values	Data source/ Model used		
			Oil Extraction Inputs	Feedstock (g, dry)	...	zzz et al. 2010		
				NG (MJ)	...	ecoinvent		
				N-Hexane (MJ)	...	GREET		
				Electricity (MJ)		
				Fugitive GHG emissions (e.g. CH ₄) at feedstock extraction		
					
			Oil Extraction Outputs	Co-product, zzz (g)		
				Protein cake from vegetable oil extraction		

Additional information:

Table 2: e_p inputs and outputs/losses for XXXX conversion process, including all the needed steps to pre-treat the feedstock in order to be able to convert it into the fuel, via the selected conversion process

	per MJ fuel		
		Values	Data source/model used
Inputs	Feedstock (g oil)	...	zzz et al. 2010
	NG (MJ)	...	ecoinvent
	H ₂ (MJ)	*	GREET
	Electricity (MJ) ³¹
	<i>Explanatory remark: placeholder for key material inputs (e.g. chemicals, etc.)</i>
Outputs	Co-product, propane mix (MJ)	**	...
	Co-product, naphtha (MJ)	**	...
	Co-product, xxxx (MJ)	**	...

	Losses, e.g. fugitive CH ₄ emissions	**	...

*H₂ derived from NG steam reforming is assumed to be default H₂ source, the emission factors of H₂ are modelled based on NG input; ** Inputs after allocation

Additional information:

Table 3: Inputs for regional electricity generation mixes ³²

	US (%) ¹	EU (%) ²	India ³ (%)	xxx (%) ⁴
Residual oil
Natural gas
Coal
Nuclear power
Biomass
Hydroelectric
Geothermal
Wind
Solar PV
Others

¹ GREET 20xx, ² EEA, 20xx (EU electricity mix 20xx), ³ International Energy Agency 20xx, ⁴ IGES List of Grid Emission Factors

³¹ Table 2 allows to detail information on electricity generation (which may be different from the regional mix).

³² Alternatively, please provide a statement with a clear referenced indication of the Greenhouse gas Intensity of the grid (gCO_{2eq}/kWh or gCO_{2eq}/MJ), and provide the reference used.

Additional information:

Table 4: e_{td} Emissions from Inputs and losses associated with the transportation of feedstock and fuels. In filling the table, please add the fuel used – In the "Data source/model used" please specify the type of fuel, the specific efficiency and energy converter, if available

	Feedstock Transportation		Data source/model used
e_{td} Inputs for Transport and Distribution	Distance (km)	xxx; xxx	
	Mode ³³	Heavy-duty truck; Train; Ship ; Barge; Rail; Pipeline; etc	
	Share (%)	yy; yy; yyy	
	Fuel Transportation		
	Distance (km) ³⁴	xxx; xxxx; xx	
	Mode	Heavy-duty truck; Train; Ship; Barge; Rail; Pipeline; etc	
	Share (%)	y; yy; yy	
	Fuel Distribution		
	Distance (km)	xx	
	Mode	Heavy-duty truck; Train; Ship; Barge; Rail; Pipeline; etc	
	Share (%)		
	
	Any other Transportation, Storage and Distribution emissions, including losses (e.g fugitive CH ₄ emissions)		

³³ In case a mode of transport includes more fuels (e.g. diesel and natural gas) or various transport modes (e.g. truck and ship), they should be properly reported in the calculation.

³⁴ Empty back-haul/return voyage(s) should be accounted in the calculation.

MAIN RESULTS

10 This section should present the results of the modelled pathway.

Table 5: Fuel identification

Fuel Pathway Code	LCV (MJ/g)	Density (kg/m ³)	C _{rCO2} (gCO _{2eq} /MJ)	Carbon Content (wt%)

Additional information:

Table 6: Proposed default emission factors for XXX-converted in a YYYY pathway

Fuel Pathway Code	Region	e _{fecu} Feedstock cultivation/extraction	e _{td} Feedstock and fuel transportation/storage/distribution	e _p Fuel production	(Sum of the terms) Proposed WtT GHG intensity (gCO _{2eq} /MJ) emission factors
	XXXX				

Additional information:

Table 7: Proposed default emission factors for XXX-converted in a YYYY pathway for comparative purposes using GWP20

A CALCULATION USING GLOBAL WARMING POTENTIAL OVER A 20-YEAR HORIZON (GWP20) MAY BE PROVIDED AS INFORMATION FOR COMPARATIVE PURPOSES.

Fuel Pathway Code	Region	e _{fecu} Feedstock cultivation/extraction	e _{td} Feedstock and fuel transportation/storage/distribution	e _p Fuel production	(Sum of the terms) Proposed WtT GHG intensity (gCO _{2eq} /MJ) emission factors
	XXXX				

Additional information:

APPENDIX

- 11 Brief description of the pathway
- 12 Brief description of the technology
-

REFERENCES

- 13 REF (APA format)

APPENDIX 5

TEMPLATE FOR TANK-TO-WAKE DEFAULT EMISSION FACTOR SUBMISSION

SUMMARY

This document presents a template to provide the minimum set of information to submit values for consideration as Tank-to-Wake (TtW) default emission factors.

INTRODUCTION

This template provides the form to submit values for consideration as Tank-to-Wake (TtW) default emission factors, with a minimum set of relevant technical and scientific information to allow the analysis of the adequacy of the proposed values.

TtW default emission factors should be calculated using representative and conservative assumptions, which encompass variable conditions onboard of the ships and performance of energy converters.

The rules to establish TtW default emission factor are described in paragraphs 9.17 and 9.22 of the LCA Guidelines. To establish a TtW default emission factor (with the exception of C_{iCO_2}), at least three (3) reference values, from three different representative sources should be considered among the three (or more) values to be considered, the upper emission value should be selected as default, and the range of available emission factors should be provided for informative purposes. The reference values should be accompanied by the relevant technical and scientific information and evaluated against the corresponding information as appropriate, including the agreement between the reference values.

The LCA Guidelines allows demonstration of superior GHG performance compared to the default emission factors, through actual emission factors subject to verification and certification by a third party.

PART A – EMISSION FACTORS FOR COMBUSTED FUEL (C_{iCH_4} and C_{iN_2O})

This part should contain the data to support proposals for C_{iCH_4} and C_{iN_2O} as defined in the LCA Guidelines;

Term	Units	Explanation
C_{iCH_4}	g_{CH_4}/g_{fuel}	CH ₄ emission conversion factor (g_{CH_4}/g_{fuel} delivered to the ship) for emissions of the combustion and/or oxidation process of the fuel used by the ship ³⁶
C_{iN_2O}	g_{N_2O}/g_{fuel}	N ₂ O emission conversion factor (g_{N_2O}/g_{fuel} delivered to the ship) for emissions of the combustion and/or oxidation process of the fuel used by the ship

³⁶ For LNG/CNG fuel, the C_{slip_engine} is covering the role of C_{iCH_4} , so C_{iCH_4} is set to zero for these fuels.

1 METHODOLOGY

This section should clearly present the methodology for the measurements made and associated uncertainty.

Additional details and relevant information may be added in appendices, such as measurement procedures and equipment used, test-bed/onboard measurement, etc.

2 ENERGY CONVERTER DIFFERENTIATION

This section should clearly present the Energy converter differentiation (general model range)³⁷ shall be included in the proposed values, and the reasoning to follow such differentiation.

3 MAIN RESULTS

This section should present the results.

Table 1: Proposed values for C_{fCH4} and C_{fN2O}

Fuel ³⁸									
Order	Group	Fuel type	Energy converter ³⁹	Test Cycle ⁴⁰	Measurement Method ⁴¹	C_{fCH4} (g _{CH4} /g _{fuel}) 42	C_{fN2O} (g _{N2O} /g _{fuel}) 43	Uncertainty	
Example	5	Marine Diesel/Gas Oil (ISO 8217 Grades DMX, DMA, DMZ and DMB maximum 0.10 % S)	MDO/MGO (ULSFO)_f_SR_gm	Two stroke Low speed Main engine	NTC-E3	Test-bed measurement	x	y	z%

³⁷ Example: ICE/Piston Engines (2-Stroke, SSD/MSD), ICE/Piston Engines (4-Stroke, MSD), ICE/Piston Engines (4-Stroke, HSD), ICE/Gas Turbines (GT), Boilers, Dual Fuel, 4-stroke, Medium Speed, Low Pressure/Otto Cycle (LPMSDF 4-s Otto), Dual Fuel, 4-stroke, Medium Speed, High Pressure/Otto Cycle (HPMSDF 4-s Diesel), Dual Fuel, 2-stroke, Low Speed, Low Pressure/Otto Cycle (LPLSDF 2-s Otto), Dual Fuel (DF), 2-stroke, Low Speed, High Pressure/Diesel Cycle (HPLSDF 2-s Diesel), Gas-only, 4-stroke, Medium Speed, Low Pressure/Otto Cycle (LPMSGas 4-s Otto), Gas-only, 4-stroke, High Speed, Low Pressure/Otto Cycle (LPHSGas 4-s Otto), DF Boilers (DFB), Methane Reformer, (MRCH4), Methanol Reformer (MRCH3OH).

³⁸ Fuel pathways listed in appendix 1 of the LCA guidelines (resolution MEPC.391(81)).

³⁹ The proposal of default values should include a differentiation per energy converter with a technical explanation on how the Energy Converter classes were defined, the make and model of the engine where the emission tests was carried out, including engine design year.

⁴⁰ It should be detailed the measurements at each load point.

⁴¹ For example, a reference to ISO 8178 and NO_x Technical Code 2008. It should include the list of instruments used to measure emissions, test location (lab/onboard).

⁴² The proposed data should be expressed in g_{CH4}/g_{fuel} consumed by the energy converter. If from the data submitted arises the need to differentiate C_{fCH4} by energy converter, then a C_{fCH4} expressed in g_{CH4}/g_{fuel} delivered to the ship needs to be calculated trough the weighted average of the different C_{fCH4} taking in consideration the fuel consumed on each energy converter.

⁴³ The proposed data should be expressed in g_{N2O}/g_{fuel} consumed by the energy converter. If from the data submitted arises the need to differentiate C_{fN2O} by energy converter, then a C_{fN2O} expressed in g_{N2O}/g_{fuel} delivered to the ship needs to be calculated trough the weighted average of the different C_{fN2O} taking in consideration the fuel consumed on each energy converter.

Additional information:

PART B – EMISSION FACTORS FOR FUEL SLIPPAGE (C_{slip})

This part should contain the data to support proposals for C_{slip} as defined in the LCA Guidelines;

Term	Units	Explanation
C_{slip_ship}	% of total fuel mass	Factor accounting for fuel (expressed in % of total fuel mass delivered to the ship) which escapes from the energy converter without being oxidized (including fuel that escapes from combustion chamber/oxidation process and from crankcase, as appropriate) $C_{slip_ship} = C_{slip} * (1 - C_{fug}/100)$
C_{slip}	% of total fuel mass	Factor accounting for fuel (expressed in % of total fuel mass consumed in the energy converter) which escapes from the energy converter without being oxidized (including fuel that escapes from combustion chamber/oxidation process and from crankcase, as appropriate)

1 METHODOLOGY

This section should clearly present the methodology for the measurements made and associated uncertainty.

Additional details and relevant information may be added in appendices, such as measurement procedures and equipment used, test-bed/onboard measurement, etc.

2 ENERGY CONVERTER DIFFERENTIATION

This section should clearly present the Energy converter differentiation (general model range)⁴⁴ shall be included in the proposed values, and the reasoning to follow such differentiation.

3 MAIN RESULTS

This section should present the results.

⁴⁴ Example: ICE/Piston Engines (2-Stroke, SSD/MSD), ICE/Piston Engines (4-Stroke, MSD), ICE/Piston Engines (4-Stroke, HSD), ICE/Gas Turbines (GT), Boilers, Dual Fuel, 4-stroke, Medium Speed, Low Pressure/Otto Cycle (LPMSDF 4-s Otto), Dual Fuel, 4-stroke, Medium Speed, High Pressure/Otto Cycle (HPMSDF 4-s Diesel), Dual Fuel, 2-stroke, Low Speed, Low Pressure/Otto Cycle (LPLSDF 2-s Otto), Dual Fuel (DF), 2-stroke, Low Speed, High Pressure/Diesel Cycle (HPLSDF 2-s Diesel), Gas-only, 4-stroke, Medium Speed, Low Pressure/Otto Cycle (LPMSGas 4-s Otto), Gas-only, 4-stroke, High Speed, Low Pressure/Otto Cycle (LPHSGas 4-s Otto), DF Boilers (DFB), Methane Reformer, (MRCH4), Methanol Reformer (MRCH3OH).

Table 2: Proposed values for C_{slip}

	Fuel ⁴⁵			Energy converter ⁴⁷	Test Cycle	Measurement Method ⁴⁸	C_{slip} ⁴⁶		Uncertainty
	Order	Group	Fuel type				C_{slip} Exhaust 49	C_{slip} Crankcase 49	
Example	31	LNG	Liquefied Natural Gas (Methane)	Low Pressure Four stroke medium speed Auxiliary engine	NTC - D2	Test-bed measurement	x%	y%	z%

Additional information:

PART C – EMISSION FACTORS FOR FUGITIVE EMISSIONS (C_{fug})

This part should contain the data to support proposals for C_{fug} as defined in the LCA Guidelines;

Term	Units	Explanation
C_{fug}	% of fuel mass	Factor accounting for the fuel (expressed in % of mass of the fuel delivered to the ship) which escapes between the tanks up to the energy converter which is leaked, vented or otherwise lost in the system

1 METHODOLOGY

This section should clearly present the methodology for the measurements made and associated uncertainty.

Additional details and relevant information may be added in appendices, such as measurement procedures and equipment used.

2 DEFAULT VALUES DIFFERENTIATION

This section should clearly present the proposed way-forward to differentiate fugitive emissions, for example per energy converter, re-liquefaction equipment or Ship type.

3 MAIN RESULTS

This section should present the results.

⁴⁵ Fuel pathways listed in appendix 1 of the LCA guidelines (resolution MEPC.391(81)).

⁴⁶ $C_{slip} = C_{slip_Exhaust} + C_{slip_Crankcase}$

⁴⁷ The proposal of default values should include a differentiation per energy converter with a technical explanation on how the Energy Converter classes were defined, the make and model of the engine where the emission tests was carried out, including engine design year.

⁴⁸ For example, a reference to ISO 8178 and NO_x Technical Code 2008. It should include the list of instruments used to measure emissions and test location (lab/onboard).

⁴⁹ The proposed data should be expressed in gCH₄/g fuel consumed by the energy converter.

Table 3: Proposed values for C_{fug}

	Fuel ⁵⁰			Fugitive Emissions Class ⁵¹	Measurement Method ⁵²	C_{fug} ⁵³	Uncertainty
	Order	Group	Fuel type				
Example	31	LNG	Liquefied Natural Gas (Methane)	LNG Tanker	Onboard measurement	x%	y%

Additional information:

Part D – APPENDIX

Brief description of the procedures to collect data and the data collected used to calculate the proposed values, for example the emissions at each load point of the Test Cycle.

Part E – REFERENCES

REF (APA format)

⁵⁰ Fuel pathways listed in appendix 1 of the LCA guidelines (resolution MEPC.391(81)).

⁵¹ A differentiation may be proposed, for example per energy converter, re-liquefaction equipment or ship type.

⁵² For example a reference to ISO 8178 and NO_x Technical Code 2008. It should include the list of instruments used to measure emissions and test location (lab/onboard).

⁵³ Expressed in % of mass of the fuel delivered to the ship.

RESOLUTION MEPC.391(81) (adopted on 22 March 2024)
2024 GUIDELINES ON LIFE CYCLE GHG INTENSITY OF MARINE FUELS
(2024 LCA GUIDELINES)