

MSC 92/26/Add.1/Corr.1  
REPORT OF THE MARITIME SAFETY COMMITTEE ON  
ITS NINETY-SECOND SESSION  
Corrigendum

MARITIME SAFETY COMMITTEE  
92nd session  
Agenda item 26

MSC 92/26/Add.1/Corr.1  
26 November 2013  
Original: ENGLISH

**REPORT OF THE MARITIME SAFETY COMMITTEE ON  
ITS NINETY-SECOND SESSION**

**Corrigendum**

1 Annex 1 (resolution MSC.349(92) – Code for Recognized Organizations (RO Code)) is modified as follows:

- .1 In the "**Contents**", the numbers of the last two chapters under Appendix 1 are replaced by "A1.10" and "A1.11".
- .2 The word "resist" in the first and second sentences of subparagraph A1.5.5.2.2 is replaced by "resit".

2 Annex 5 (resolution MSC.353(92) – Amendments to the International Management Code for the Safe Operation of Ships and for Pollution Prevention (International Safety Management (ISM) Code)) is modified as follows:

- .1 In the section titled "**Footnotes and paragraphs for foreword of the publication of the Code**", in paragraph 3, the reference to "MSC-MEPC.7/Circ.5" is replaced by "MSC-MEPC.7/Circ.8".

3 Annex 6 (resolution MSC.354(92) – Amendments to the International Maritime Solid Bulk Cargoes (IMSBC) Code), is modified as follows:

- .1 The table **Characteristic** of **CRUSHED CARBON ANODES** in appendix 1 to the annex is replaced with the following:

**Characteristics**

<b>Angle of repose</b>	<b>Bulk density (kg/m<sup>3</sup>)</b>	<b>Stowage factor (m<sup>3</sup>/t)</b>
Not applicable	800 to 1,000	1.00 to 1.25
<b>Size</b>	<b>Class</b>	<b>Group</b>
Mainly coarse pieces up to 60 cm	Not applicable	C

4 Annex 7 (resolution MSC.355(92) – Amendments to the International Convention for Safe Containers (CSC), 1972) is modified as follows:

- .1 The title of annex is revised to read "**AMENDMENTS TO THE INTERNATIONAL CONVENTION FOR SAFE CONTAINERS (CSC), 1972**".
- .2 In the table of annex III the text in row "Bottom rail" of column (iii) is replaced by "Local deformation perpendicular to the rail in excess of 60 mm or separation cracks or tears in the rail's material: in excess of 25 mm in length in the upper flange; or of web in any length (see Note 2)".

5 Annex 10 (resolution MSC.358(92) – Amendments to the Code for the Construction and Equipment of Mobile Offshore Drilling Units, 1989 (1989 MODU Code)) is modified as follows:

- .1 In paragraph 3 of the annex, under the section titled "**14.13 Enclosed space entry and rescue drills**", subparagraph .3 is realigned vertically under subparagraph .2.
- .2 In paragraph 4 of the annex, is replaced by the following new text:

"4 Renumber existing sections 14.12 and 14.13 as 14.14 and 14.15, and replace the renumbered section 14.15 with the following:

**"14.15 Records**

The date when musters and enclosed space entry and rescue drills are held, details of abandonment drills, drills of other life-saving appliances and onboard training should be recorded in such logbook as may be prescribed by the Administration. If a full muster, drill or training session is not held at the appointed time, an entry should be made in the logbook stating the circumstances and the extent of the muster, drill or training session held."

6 Annex 11 (resolution MSC.359(92) – Amendments to the 2009 MODU Code) is modified as follows:

- .1 In paragraph 3 of the annex, under the section titled "**14.14 Enclosed space entry and rescue drills**", subparagraph .3 is realigned vertically under subparagraph .2.
- .2 The text in paragraph 6 of the annex is replaced to read "In the existing paragraphs 14.9.9, 14.12.3 and 14.14, references to the renumbered paragraphs are updated".

7 Annex 13 – Draft Amendments to SOLAS chapter II-2, the number of subparagraph 5.5.3.4 of regulation 4 is replaced by "5.5.3.3".

8 Annex 16 – Draft amendments to the IBC Code, the text of paragraph 5 is replaced by "In paragraph 8.1.5, the references to "SOLAS regulations II-2/4.5.3 and 4.5.6" are replaced by "SOLAS regulations II-2/4.5.3, 4.5.6 and 16.3.2"."

---

9 Annex 18 (resolution MSC.362(92) – Revised Recommendation on a standard method for evaluating cross-flooding arrangements), the annex is replaced by the following<sup>1</sup>:

**"ANNEX**

**REVISED RECOMMENDATION ON A STANDARD METHOD FOR EVALUATING  
CROSS-FLOODING ARRANGEMENTS**

Table of contents

1	Definitions
2	Formulae
3	Air pipe venting criteria
4	Alternatives
Appendix 1	Examples for treatment of heel angles and water heads at different stages of cross-flooding
Appendix 2	Friction coefficients in cross-flooding arrangements
Appendix 3	Example using figures for a passenger ship

---

<sup>1</sup> The *Revised Recommendation on a standard method for evaluating cross-flooding arrangements* was editorially revised for the purpose of clarity.

## 1 Definitions

$\sum k$ : Sum of friction coefficients in the considered cross-flooding arrangement.

$S$  (m<sup>2</sup>): Cross-section area of the cross-flooding pipe or duct. If the cross-section area is not circular, then:

$$S_{equiv} = \frac{\pi \cdot D_{equiv}^2}{4}$$

where:

$$D_{equiv} = \frac{4 \cdot A}{\rho}$$

$A$  = actual cross-section area  
 $\rho$  = actual cross-section perimeter

$\theta_0$  (°): Angle before commencement of cross-flooding. The cross-flooding device may be assumed to be full or empty dependent on its arrangement and internal volume (see figure 1(b) in appendix 1).

$\theta_f$  (°): Heel angle at final equilibrium ( $\theta_f \leq \theta$ ).

$\theta$  (°): Any angle of heel between the commencement of cross-flooding and the final equilibrium at a given time.

$W_f$  (m<sup>3</sup>): Volume of water which is used to bring the ship from commencement of cross-flooding  $\theta_0$  to final equilibrium  $\theta_f$ .

$W_\theta$  (m<sup>3</sup>): Volume of water which is used to bring the ship from any angle of heel  $\theta$  to the final equilibrium  $\theta_f$ .

$H_0$  (m<sup>3</sup>): Head of water before commencement of cross-flooding, with the same assumption as for  $\theta_0$ .

$H_\theta$  (m<sup>3</sup>): Head of water when any angle of heel  $\theta$  is achieved.

$h_f$  (m): Final head of water after cross-flooding ( $h_f = 0$ , when the level inside the equalizing compartment is equal to the free level of the sea).

$g$  (m/s<sup>2</sup>): The acceleration due to gravity (9.81 m/s<sup>2</sup>).

## 2 Formulae

2.1 Time required from commencement of cross-flooding  $\theta_0$  to the final equilibrium  $\theta_f$ .

$$T_f = \frac{2W_f}{S \cdot F} \cdot \frac{1}{\sqrt{2gH_0}} \cdot \frac{1}{\left(1 + \sqrt{\frac{h_f}{H_0}}\right)}$$

2.2 Time required to bring the ship from any angle of heel  $\theta$  to the final equilibrium  $\theta_f$ :

$$T_{\theta} = \frac{2W_{\theta}}{S \cdot F} \cdot \frac{1}{\sqrt{2gH_{\theta}}} \cdot \frac{1}{\left(1 + \sqrt{\frac{h_f}{H_{\theta}}}\right)}$$

2.3 Time required from commencement of cross-flooding  $\theta_0$  until any angle of heel  $\theta$  is achieved:

$$T = T_f - T_{\theta}$$

2.4 Dimensionless factor of reduction of speed through an equalization device, being a function of bends, valves, etc. in the cross-flooding system:

$$F = \frac{1}{\sqrt{(\sum k) + 1}}$$

Values for  $k$  can be obtained from appendix 2 or other appropriate sources such as computational fluid dynamics (CFD) or model testing. If other appropriate sources are used, then the +1 factor in the formulae may not be appropriate. CFD can also be used to evaluate the discharge coefficient for the whole cross-flooding duct.

2.5 Cross-flooding through successive devices of different cross-section:

If the same flow crosses successive flooding devices of cross-section  $S_1, S_2, S_3...$  having corresponding friction coefficients  $k_1, k_2, k_3...$ , then the total  $k$  coefficient referred to  $S_1$  is:

$$\sum k = k_1 + k_2 \cdot S_1^2/S_2^2 + k_3 \cdot S_1^2/S_3^2...$$

2.6 If different flooding devices are not crossed by the same volume, each  $k$  coefficient should be multiplied by the square of the ratio of the volume crossing the device and the volume crossing the reference section (which will be used for the time calculation):

$$\sum k = k_1 + k_2 \cdot S_1^2/S_2^2 \cdot W_2^2/W_1^2 + k_3 \cdot S_1^2/S_3^2 \cdot W_3^2/W_1^2...$$

2.7 For cross-flooding through devices in parallel that lead to the same space, equalization time should be calculated assuming that:

$$S \cdot F = S_1 \cdot F_1 + S_2 \cdot F_2 + ...$$

With  $F = \frac{1}{\sqrt{(\sum k) + 1}}$  for each device of cross-section  $S_i$

### 3 Air pipe venting criteria

3.1 In arrangements where the total air pipe sectional area is 10 per cent or more of the cross-flooding sectional area, the restrictive effect of any air back pressure may be neglected in the cross-flooding calculations. The air pipe sectional area should be taken as the minimum or the net sectional area of any automatic closing devices, if that is less.

3.2 In arrangements where the total air pipe sectional area is less than 10 per cent of the cross-flooding sectional area, the restrictive effect of air back pressure should be considered in the cross-flooding calculations. The following method may be used for this purpose:

The  $k$  coefficient used in the calculation of cross-flooding time should take into account the drop of head in the air pipe. This can be done using an equivalent coefficient  $k_e$ , which is calculated according to the following formula:

$$k_e = k_w + k_a \cdot (\rho_a/\rho_w) \cdot (S_w/S_a)^2$$

where:

$k_w$  =  $k$  coefficient for the cross-flooding arrangement (water)

$k_a$  =  $k$  coefficient for the air pipe

$\rho_a$  = air density

$\rho_w$  = water density

$S_w$  = cross-section area of the cross-flooding device (water)


$S_a$  = cross-section of air pipe

### 4 Alternatives


As an alternative to the provisions in sections 2 and 3, and for arrangements other than those shown in appendix 2, direct calculation using computational fluid dynamics (CFD), time-domain simulations or model testing may also be used.

**Appendix 1**

**EXAMPLES FOR TREATMENT OF HEEL ANGLES AND WATER HEADS  
AT DIFFERENT STAGES OF CROSS-FLOODING**

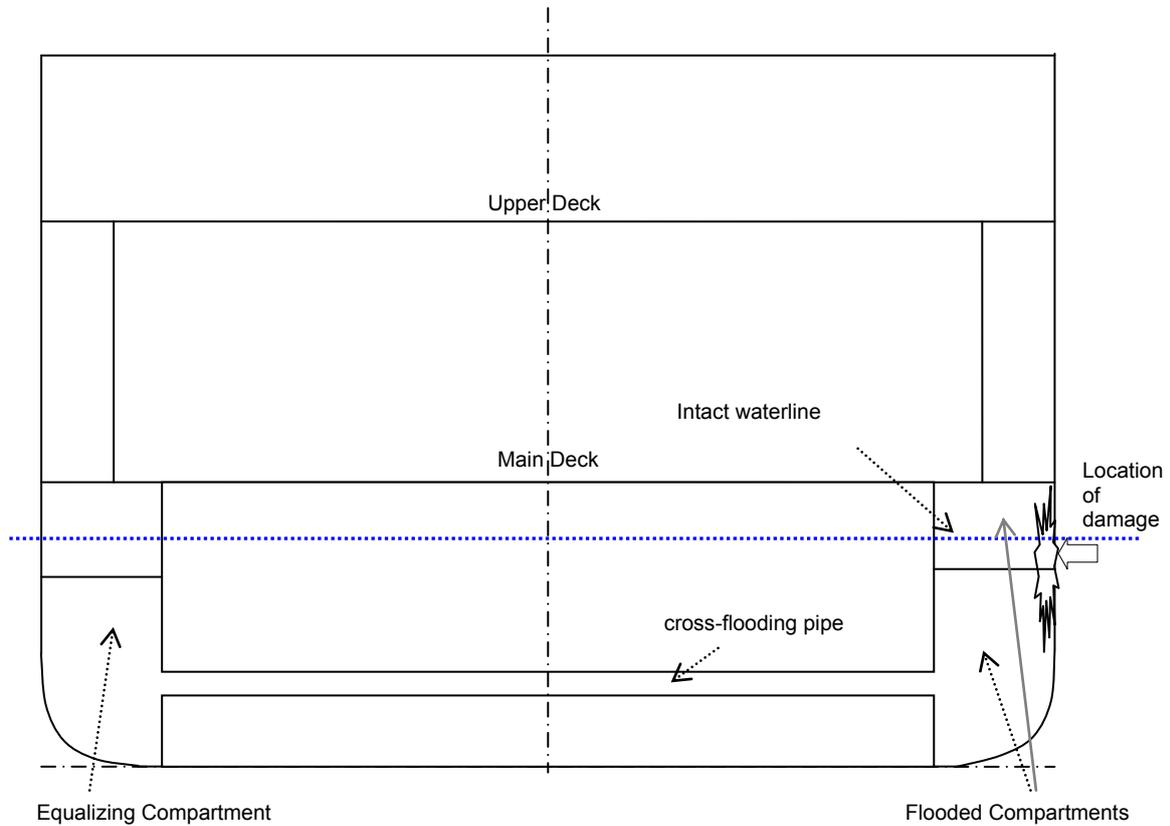


**Figure 1(a) – Section showing cross-flooding pipe and compartments**

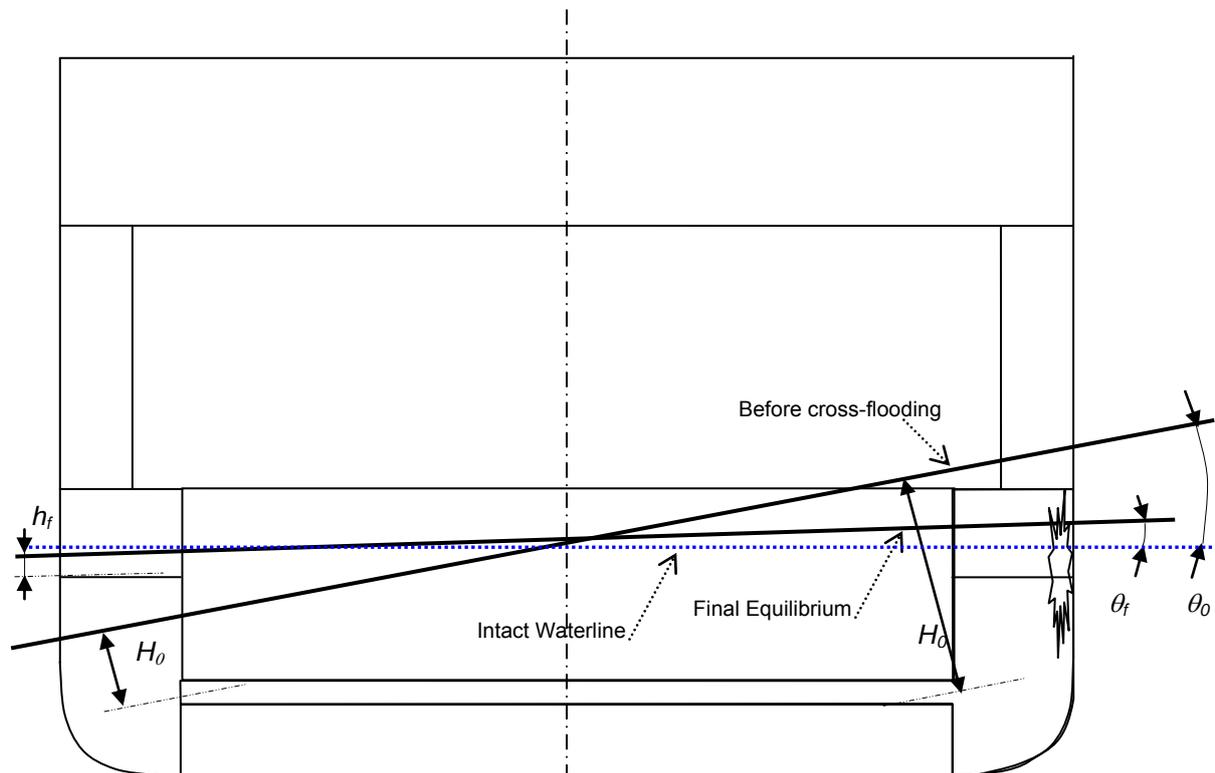

**Figure 1(b) – Initial and Final stages of cross-flooding**

*Note:  $H_0$  on the left side of figure 1(b) depicts the head of water if the cross-flooding device was assumed full whereas  $H_0$  on the right side of figure 1(b) shows the head of water if the cross-flooding device was assumed empty.*

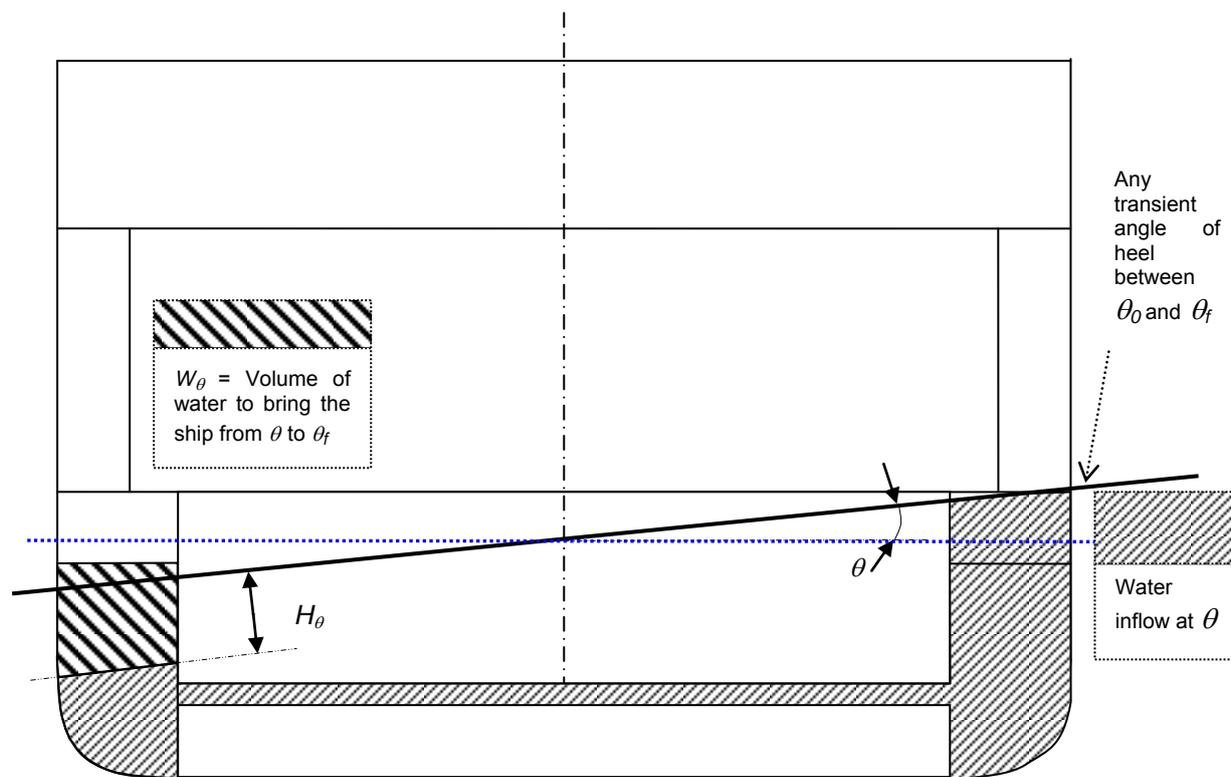

**Figure 1(c) – Situation at any transient angle of heel,  $\theta$**



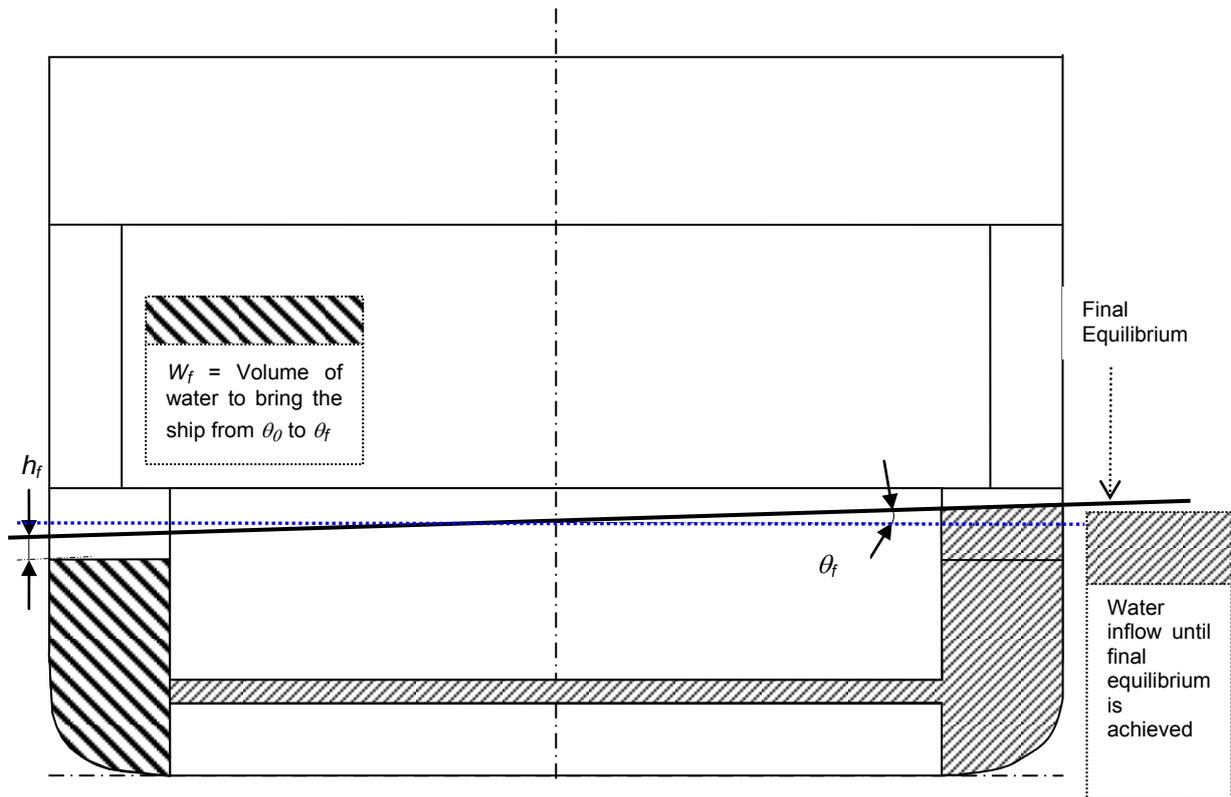


Figure 1(d) – Situation at final equilibrium

Appendix 2

FRICITION COEFFICIENTS IN CROSS-FLOODING ARRANGEMENTS

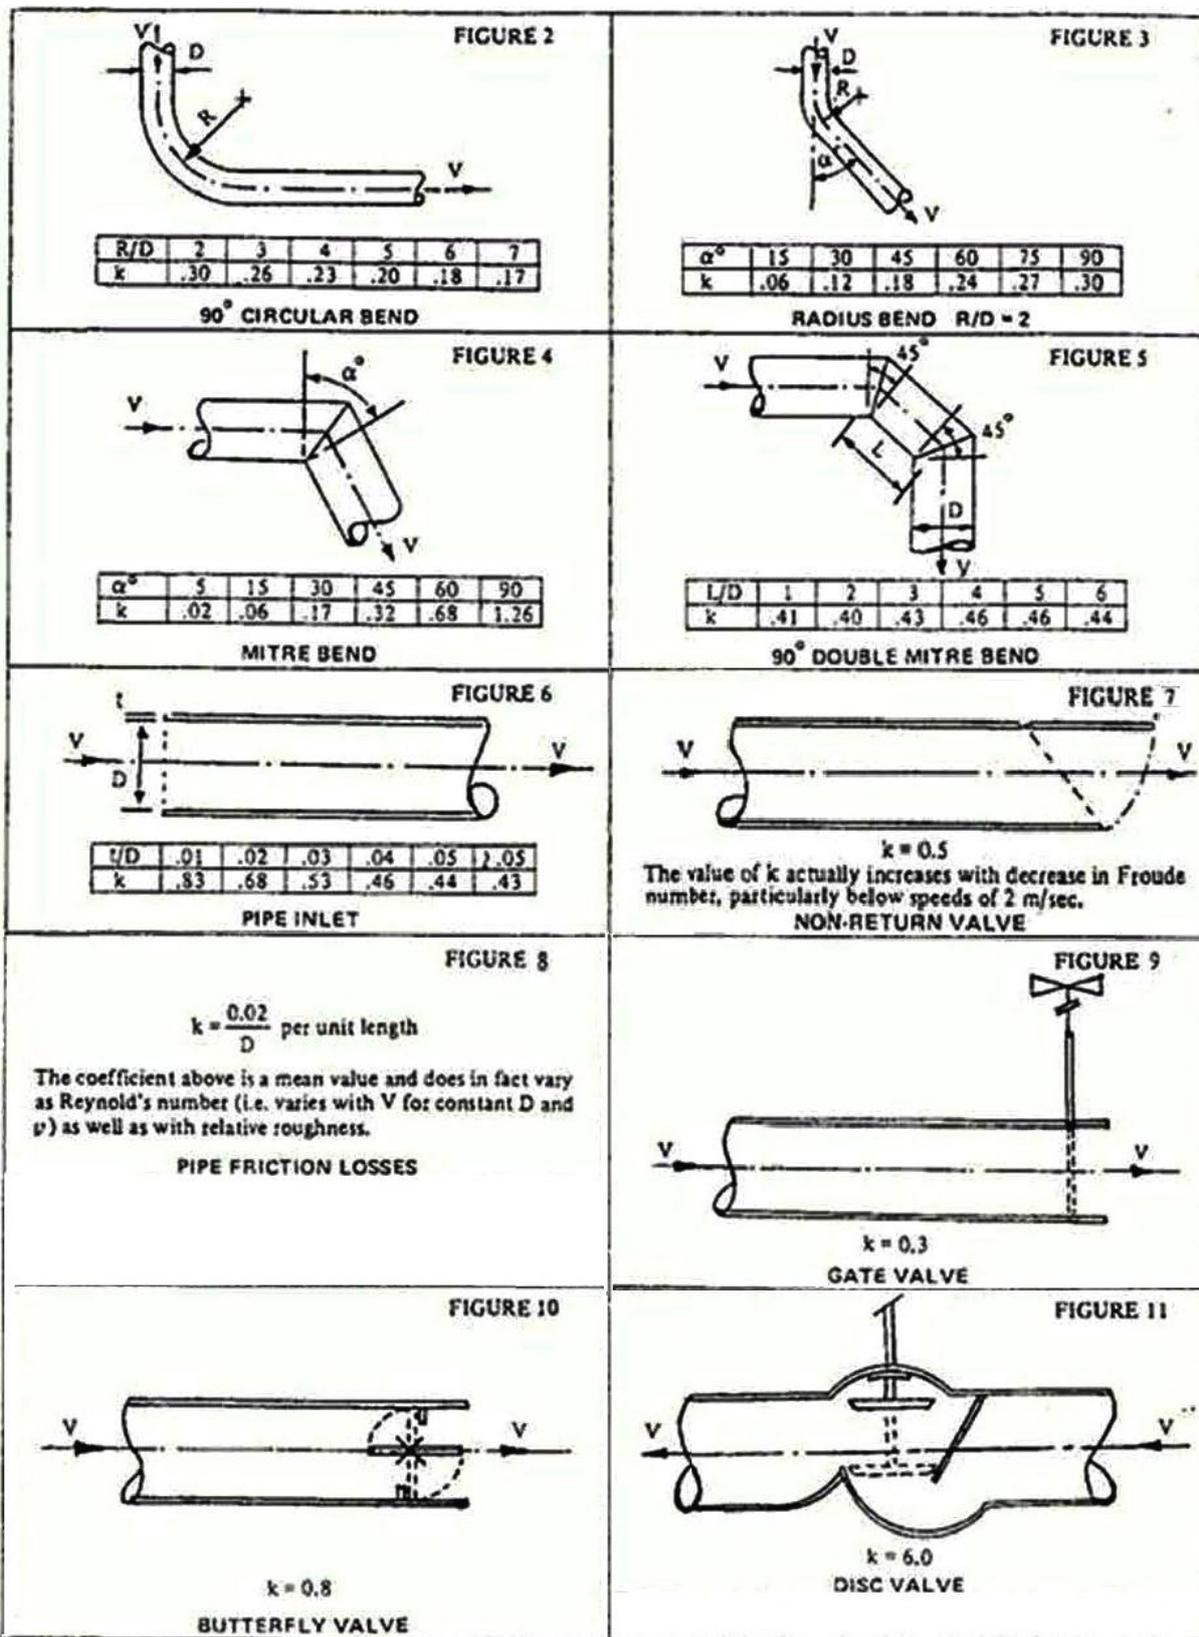

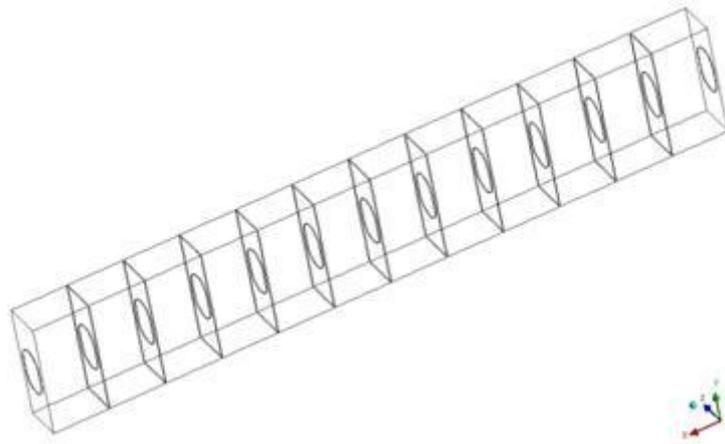


**Figure 12**  
**Cross-flooding through a series of structural ducts with 1 manhole**

$$k = 0.6718 \times L_i^{0.119} \quad (0 < L_i < 12)$$
$$k = 0.903 \quad (12 \leq L_i)$$

where:


$k$  friction coefficient related to each space between two adjacent girders  
 $L_i$  Length of the duct in meters

Note:  $k$  is evaluated with effective cross-section area therefore in calculations use the real cross-section area  $A$  and not  $S_{equiv}$ . The pressure loss for entrance in the first manhole is already computed in the calculation.

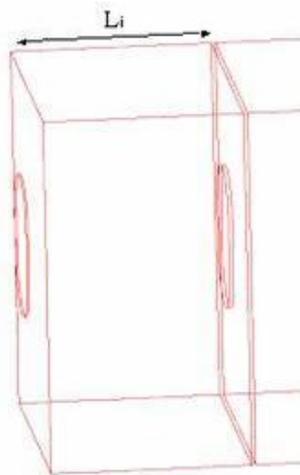

$L_i$  (in metres)

**Figure 13**

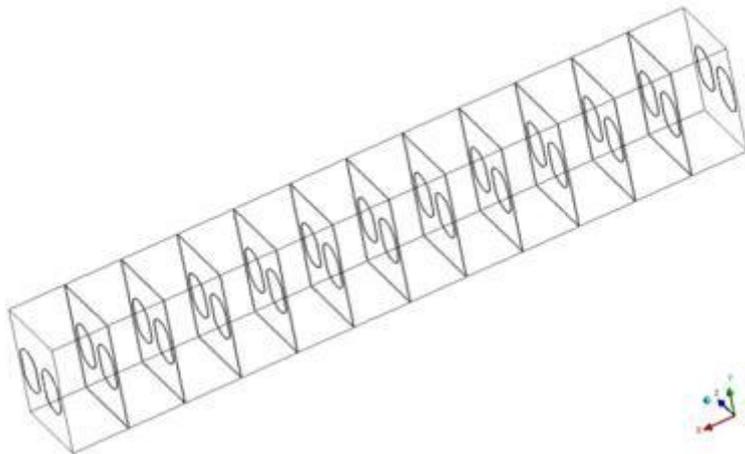

**Figure 14**  
**Cross-flooding through a series of structural ducts with 2 manholes**

$$k = 1.7968 \times L_i^{-0.026} \quad (0 < L_i < 12)$$

$$k = 1.684 \quad (12 \leq L_i)$$

where:

$k$  friction coefficient related to each space between two adjacent girders  
 $L_i$  Length of the duct in meters

Note:  $k$  is evaluated with effective cross-section area therefore in calculations use the real cross-section area  $A$  and not  $S_{equiv}$ . The pressure loss for entrance in the first manhole is already computed in the calculation.

### Appendix 3

#### EXAMPLE USING FIGURES FOR A PASSENGER SHIP

*Dimension of the considered cross-flooding pipe:*

Diameter	$D = 0.39 \text{ m}$
Length	$l = 21.0 \text{ m}$
Cross-section area	$S = 0.12 \text{ m}^2$
Wall thickness	$t = 17.5 \text{ mm}$

*k-values for the considered cross-flooding system:*

Inlet	0.45
Pipe friction $\left(\frac{0.02l}{D}\right)$	1.08
2 radius bends ( $\alpha = 45^\circ$ )	0.36
Non-return valve	0.50

Sufficient air venting is assumed to be in place.

From this follows:

$$F = \frac{1}{\sqrt{(\sum k) + 1}} \qquad F = \frac{1}{\sqrt{3.39}} = 0.54$$

Time required from commencement of cross-flooding  $\theta_0$  to the final equilibrium condition  $\theta_f$ :

$$T_f = \frac{2W_f}{S \cdot F} \cdot \frac{1}{\sqrt{2gH_0}} \left( \frac{1}{1 + \sqrt{\frac{h_f}{H_0}}} \right)$$

Head of water before commencement of cross-flooding:

$$H_0 = 5.3 \text{ m}$$

Volume of water which is used to bring the ship from commencement of cross-flooding to the final equilibrium condition:

$$W_f = 365 \text{ m}^3$$

Final head of water after cross-flooding:

$$h_f = 1.5m$$

$$T_f = \frac{2 \cdot 365m^3}{0.12m^2 \cdot 0.54} \cdot \frac{1}{\sqrt{2 \cdot 9.81m/s^2 \cdot 5.3m}} \cdot \frac{1}{\left(1 + \sqrt{\frac{1.5m}{5.3m}}\right)}$$

$$T_f = 721s$$

Calculation of any transient situation of cross-flooding:

The purpose is to find the situation after 600s.

Assumed transient situation:

Cross-flooded volume: 265 m<sup>3</sup>

Volume of water which is used to bring the vessel from the transient situation to the final equilibrium :  $W_\theta = 365 \text{ m}^3 - 265 \text{ m}^3 = 100 \text{ m}^3$

Corresponding head of water:  $H_\theta = 2.8 \text{ m}$

Time required to bring the vessel from any transient situation to the final equilibrium condition:

$$T_\theta = \frac{2W_\theta}{S \cdot F} \cdot \frac{1}{\sqrt{2gH_\theta}} \cdot \frac{1}{\left(1 + \sqrt{\frac{h_f}{H_\theta}}\right)}$$

$$T_\theta = \frac{2 \cdot 100m^3}{0.12m^2 \cdot 0.54} \cdot \frac{1}{\sqrt{2 \cdot 9.81m/s^2 \cdot 2.8m}} \cdot \frac{1}{\left(1 + \sqrt{\frac{1.5m}{2.8m}}\right)}$$

$$T_\theta = 240 \text{ s}$$

Time between commencement of cross-flooding and assumed transient situation:

$$T = T_f - T_\theta = 721 \text{ s} - 240 \text{ s} = 481 \text{ s}$$

As  $T$  is less than 600 s, further transient situations with larger cross-flooded volume may be calculated in the same way.

On the reverse, if  $T$  was of more than 600 s, further transient situation with smaller cross-flooded volume may be calculated.

Situation after 600 s may be found by successive iterations.

\*\*\*"

MSC 92/26/Add.1/Corr.1  
REPORT OF THE MARITIME SAFETY COMMITTEE ON  
ITS NINETY-SECOND SESSION  
Corrigendum